




SR-XXXP-8S-F2 (Option with 3-Bit Binary Decoder)

Outline Drawing (SP8T) with Option F2

(Phase Matched Series)

Fig. 3

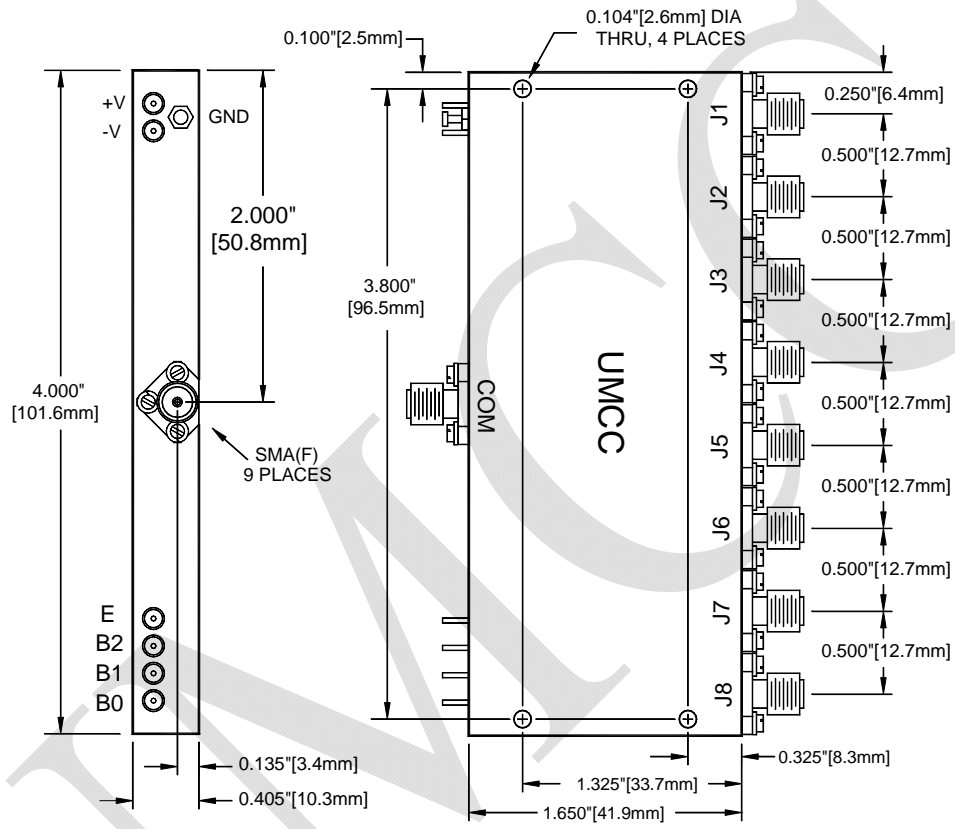

Weight	Tolerances
3.4 oz [96.4g]	±0.015" [±0.38mm]

Function Table for Option "F2" (3-Bit Binary Control + Enable)

INPUTS				RF PATH							
E	B2	B1	B0	J1	J2	J3	J4	J5	J6	J7	J8
0	0	0	0	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF
0	0	0	1	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF
0	0	1	0	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF
0	0	1	1	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
0	1	0	0	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
0	1	0	1	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
0	1	1	0	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
0	1	1	1	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON
1	X	X	X	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF