



Model: AE-B000-40X

- Insertion Loss

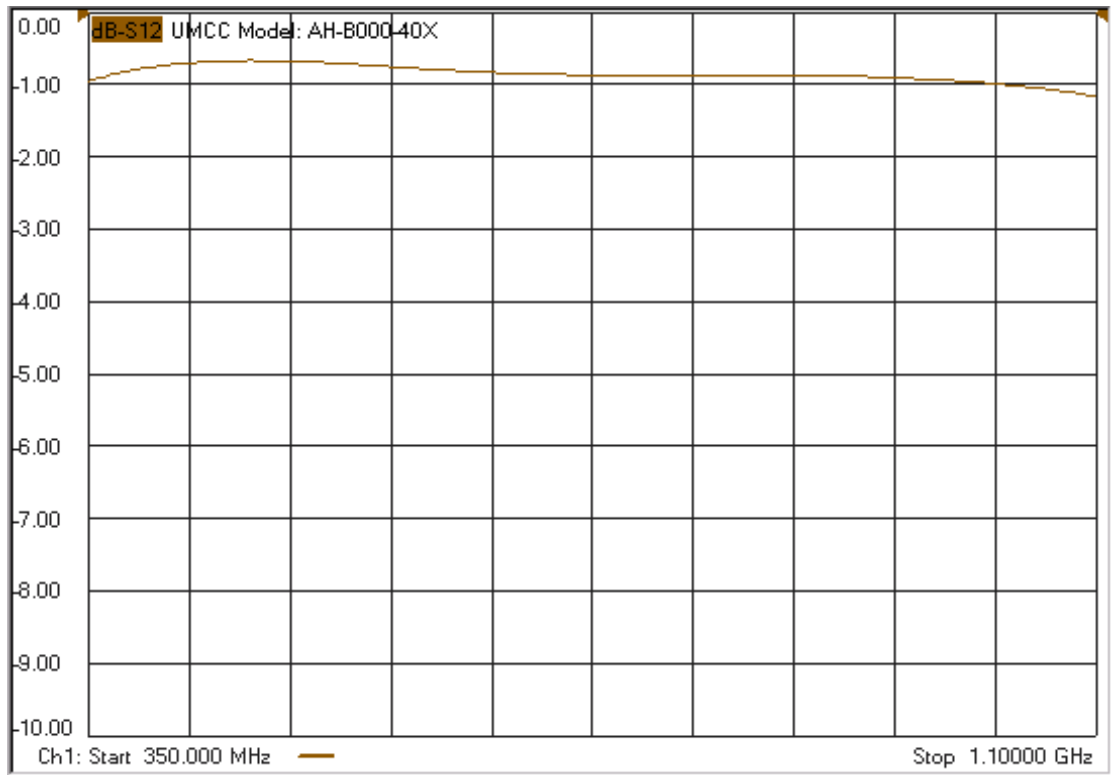


- Return Loss

Input / Output RL @ Attn = 0 dB

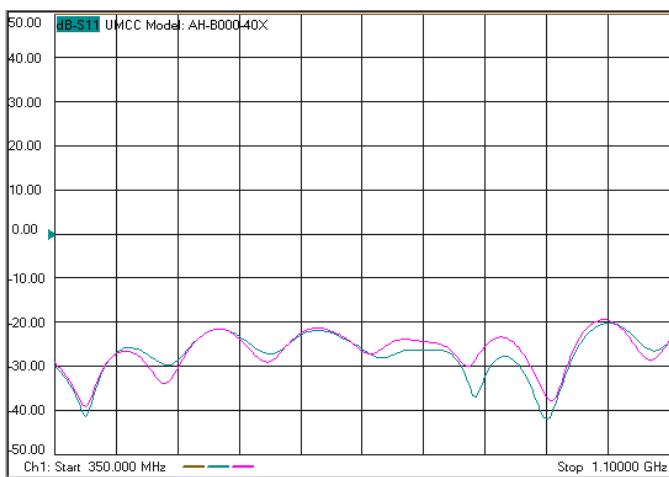


Input / Output RL @ Attn = 40 dB

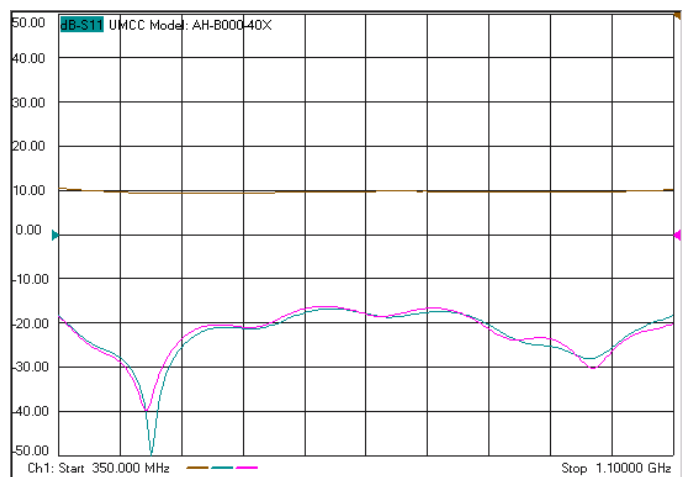


Model: AE-B000-40X

- Attenuation


Attenuation = 10dB

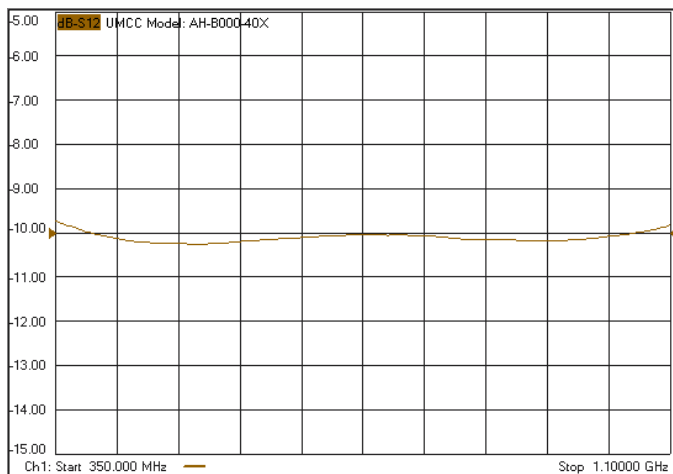


Attenuation = 20dB

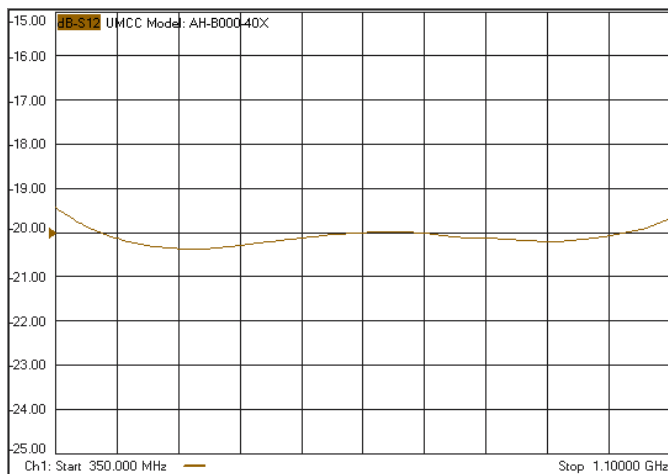

Attenuation = 30dB

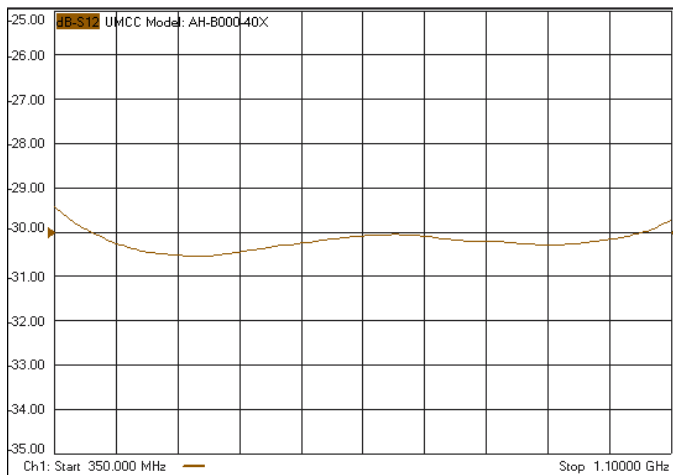


Attenuation = 40dB

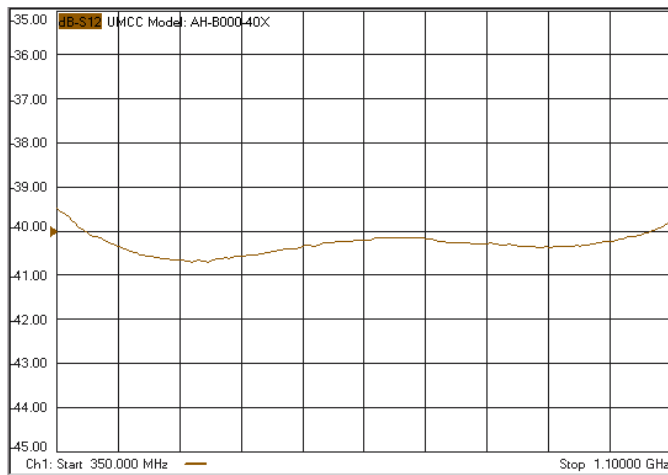


Model: AE-B000-40X

- Phase Shift


Phase Shift @ Attn = 10dB

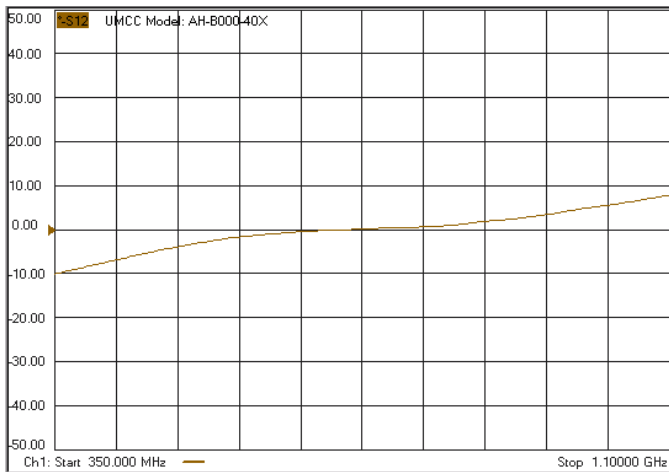

Phase Shift @ Attn = 20dB

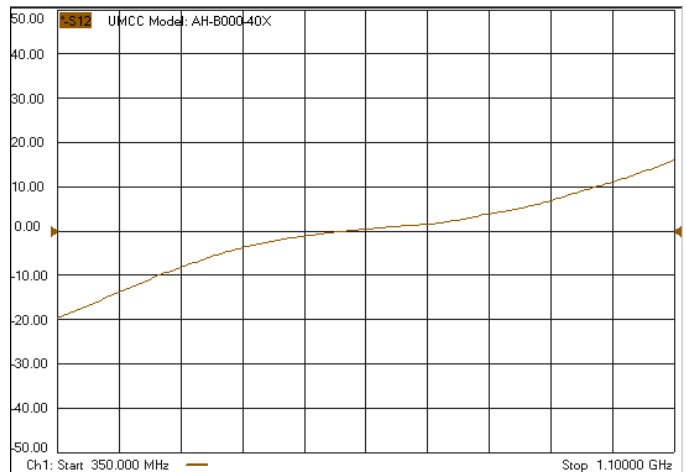

Phase Shift @ Attn = 30dB

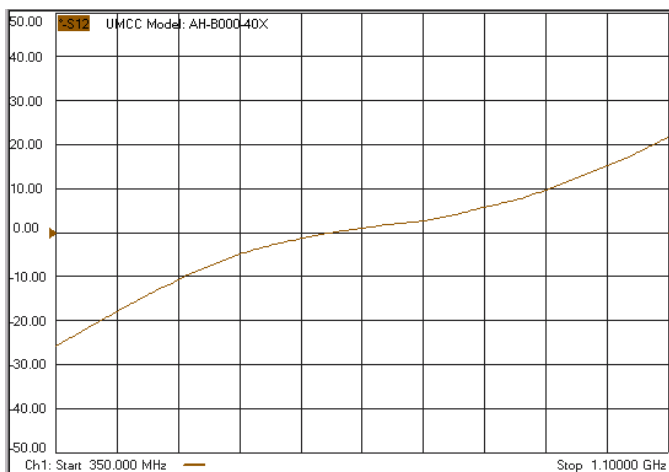

Phase Shift @ Attn = 40dB

