



Model: SR-B310-8S

Description:.....	SP8T, Absorptive, PIN-Switch
Operating Frequency:.....	20 – 6000 MHz
Insertion Loss:.....	3.0 dB Max
Isolation (Arm-to-Arm):.....	75 dB Min
VSWR (“ON” paths and “OFF” ports):.....	1.6:1 Max (1.7:1 Over 20-30MHz)
Rise/Fall time (10% to 90% RF, 90% to 10% RF):... ..	200 ns Max
On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF):.....	300 ns Max
Operating Power:.....	CW / AVG..... +27dBm Max *
.....	{+23dbm Max below 100MHz}
.....	Peak:..... 5W @ 5µS PW Max
Control Input Characteristics:.....	TTL / Unit-Load / Floating-High
Control Logic:.....	8-Controls, Logic “0” = RF Path “ON”
Power Supplies:.....	+5(±0.25)V @ 210mA Max
.....	-12(±0.5)V @ 90mA Max
Connectors (RF):.....	SMA (f), Removable
Connectors (Supplies/Controls).....	Solder Pins
Impedance:.....	50 Ω Nominal
Quality:.....	Best-Commercial-Grade

Environmental Ratings:

Temperature:.....	{Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity:.....	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock:.....	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration:.....	MIL-STD-202F, Method 204D, Cond. B (.06” double amplitude, or 15G)
Altitude:.....	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock:.....	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

- A1 [+5(±0.25)V / -5(±0.25)V]*
- A2 [+5(±0.25)V / -15(±0.5)V]
- A3 [+12(±0.5)V / -12(±0.5)V]
- A4 [+15(±0.5)V / -15(±0.5)V]

■ **RF Connectors**

- B1 [J1 – J8 Ports with SMA(M)]
- B2 [All SMA (M)]
- B3 [COM Port with SMA(M)]

■ **Control Function**


- F1 [Inverse Logic, (“1” = Path “ON”)]
- F2 [3-Bit Binary Controls + Enable] ; see below for “Outline Drawing” and “Function Table”

* Recommended for Low Power Consumption <> Additional Switching Delay (ON/OFF time)



Model: SR-B310-8S

Outline

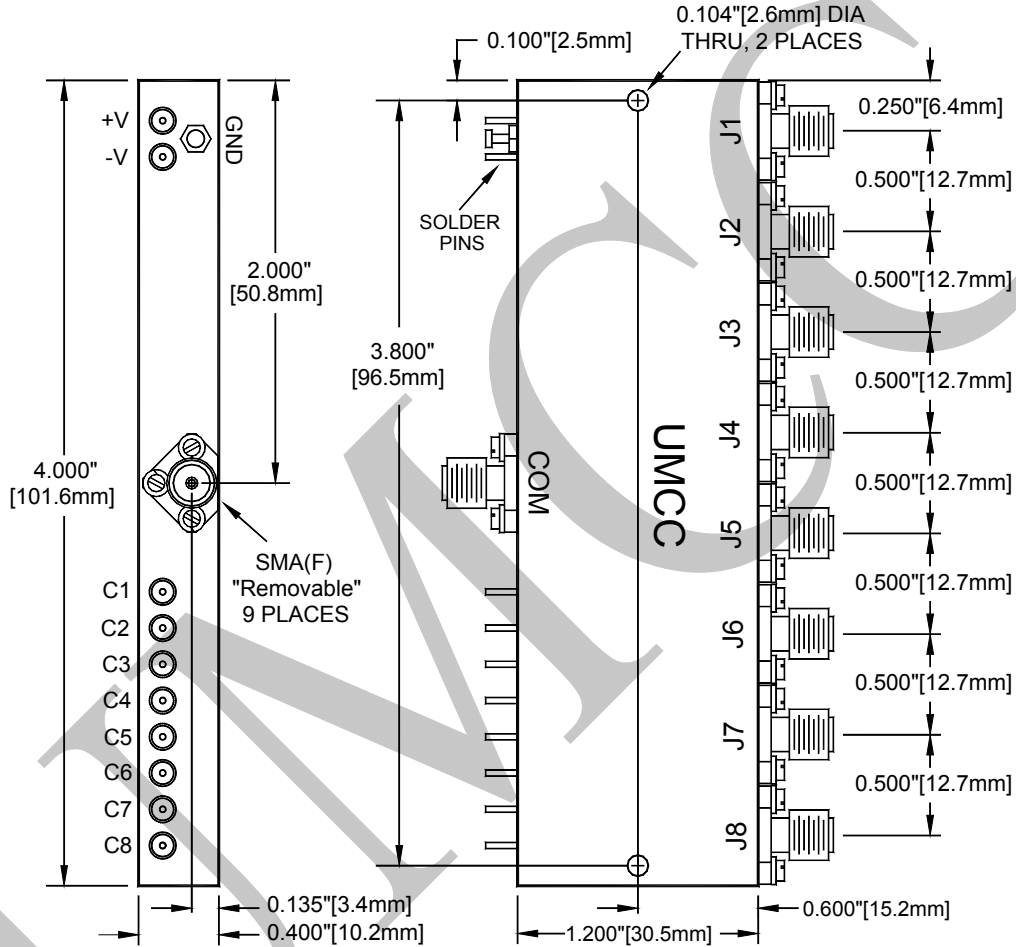


Weight	Tolerances
2.8 oz [79.4g]	±0.015" [±0.38mm]



Model: SR-B310-8S

Outline (Option "F2" for 3-Bit Binary Control + Enable)

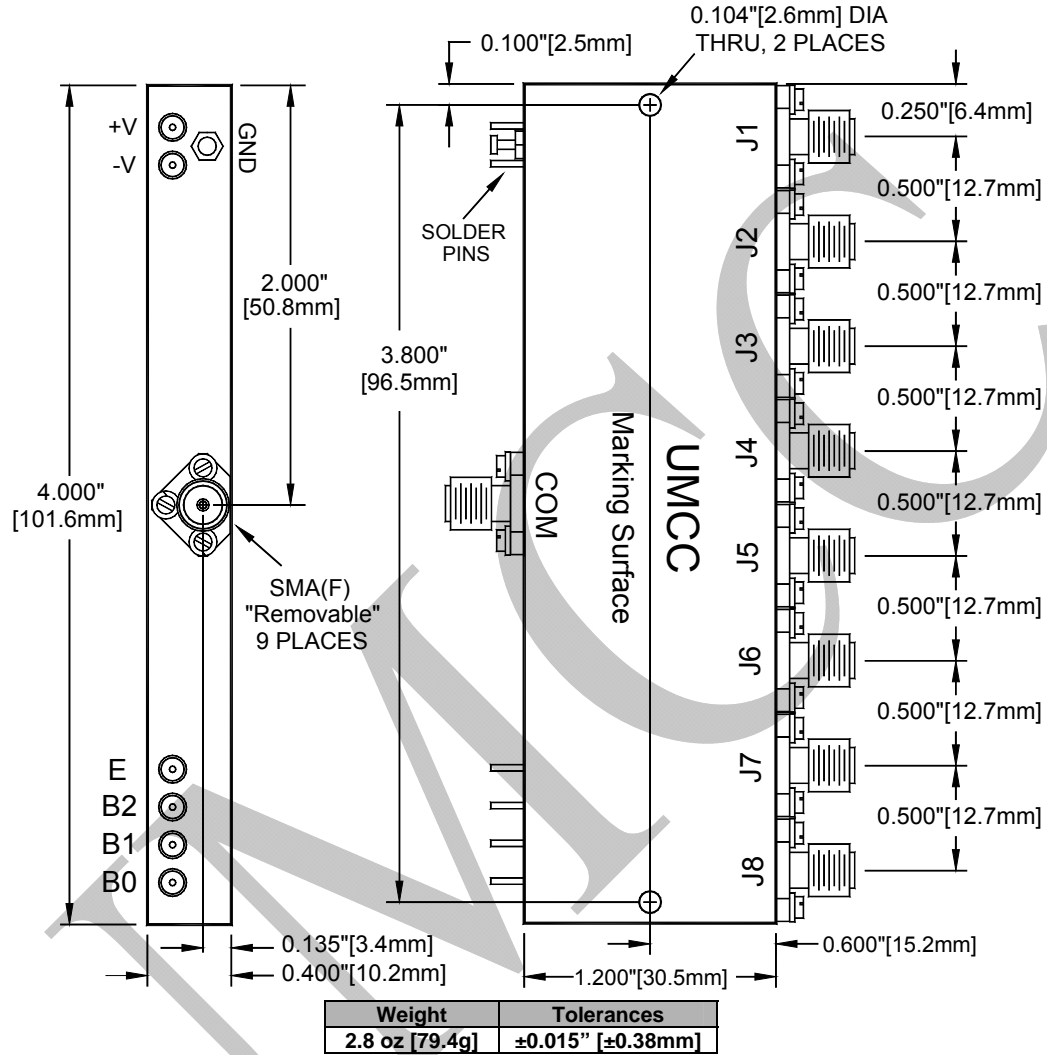

Function Table for Option "F2" (3-Bit Binary Control + Enable)

INPUTS				RF PATH							
E	B2	B1	B0	J1	J2	J3	J4	J5	J6	J7	J8
0	0	0	0	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF
0	0	0	1	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF
0	0	1	0	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF
0	0	1	1	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
0	1	0	0	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
0	1	0	1	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
0	1	1	0	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
0	1	1	1	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON
1	X	X	X	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF