




SR-XXXX-10S-F2 (Option with 4-Bit Binary Decoder)

**Outline Drawing (SP10T with Option "F2")**

**Fig. 3**

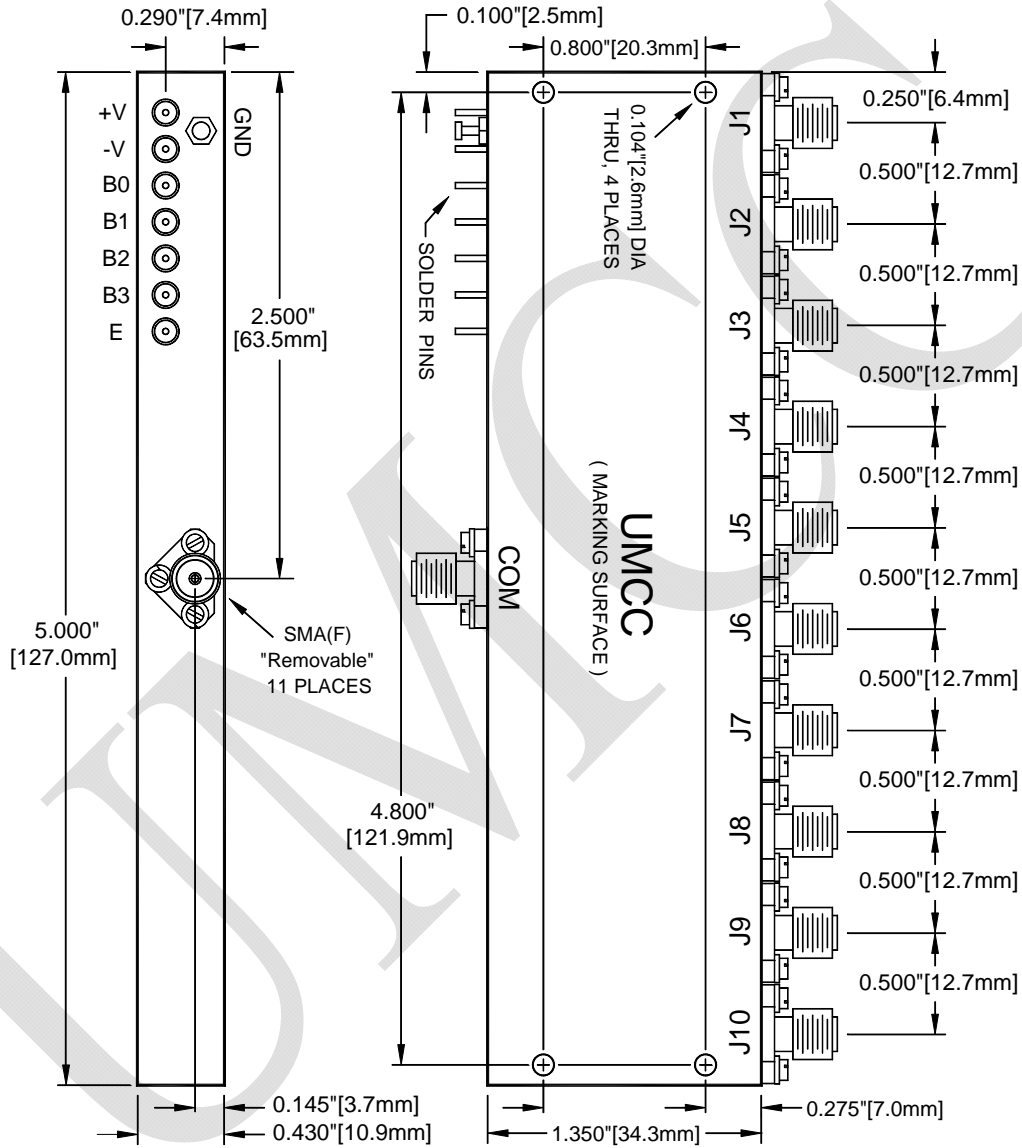

Weight	Tolerances
3.8 oz [108g]	±0.015" [±0.38mm]



SR-XXXX-10S-F2 (Option with 4-Bit Binary Decoder)

Function Table for Option "F2" (4-Bit Binary Control + Enable)

INPUTS					RF PATH FROM "COM" PORT TO "JXX" PORT									
E	B3	B2	B1	B0	J1	J2	J3	J4	J5	J6	J7	J8	J9	J10
0	0	0	0	0	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
0	0	0	0	1	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
0	0	0	1	0	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF
0	0	0	1	1	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF
0	0	1	0	0	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF
0	0	1	0	1	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
0	0	1	1	0	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
0	0	1	1	1	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
0	1	0	0	0	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
0	1	0	0	1	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON
1	X	X	X	X	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

