



Model: AE-H000-40C


Description:	Current Controlled PIN Attenuator
Operating Frequency:	2.25 – 6.75 GHz
Phase-Invariant Frequency Region (± 10 Deg):	3.05 – 5.0 GHz
Insertion Loss (0dB Attn. Ref.):	2.0 dB Max
Attenuation Range:	0 – 40 dB Nominal Min
Attenuation Flatness:	1.0 dB Peak-Peak up to 10 dB
	1.2 dB Peak-Peak up to 20 dB
	1.5 dB Peak-Peak up to 30 dB
	1.9 dB Peak-Peak up to 40 dB
Control Function:	0 – 10 mA Forward Current (approx.)
VSWR (all settings):	1.5:1 Max
Settling Time ("±1dB of Target Setting"):	500 ns Max, (5µs<math>< PW < 0.1s</math>)
Power Handling:	Operating +20 dBm CW/Peak Max
	Survival +30 dBm CW/AVG Max
Connectors (RF):	SMA (f), Removable
Connector (Supply & Controls):	Solder Pins
Impedance:	50 Ohms Nominal
Quality:	Best-Commercial-Grade

Environmental Ratings:

Temperature:	{Operating: -40°C to +85°C} & {Storage: -50°C to +100°C}
Humidity:	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock:	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration:	MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude:	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock:	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Outline

("A" = 0.515" [13.1mm])

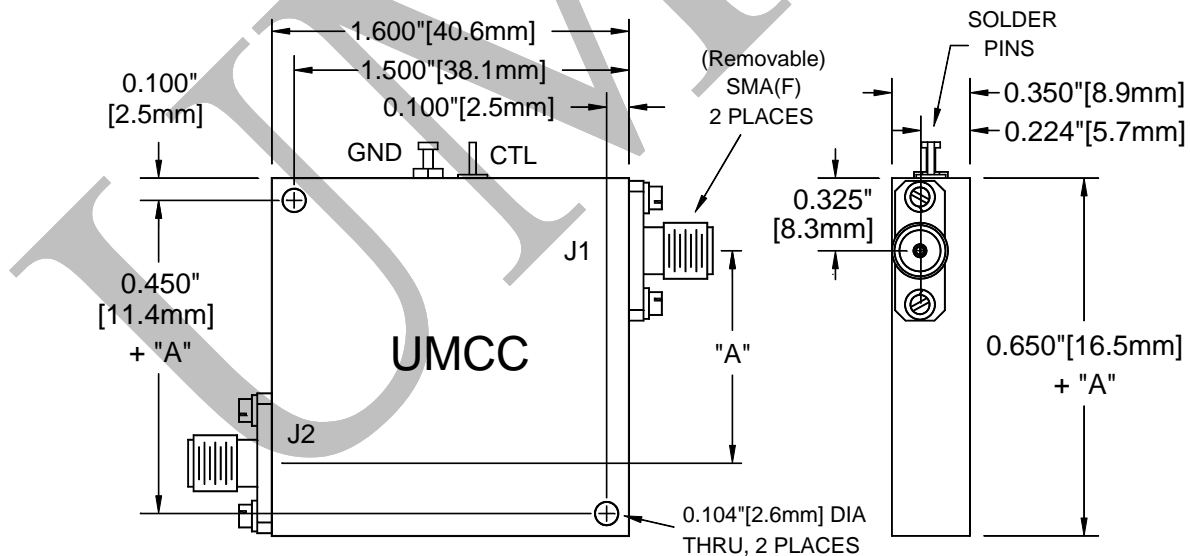

Weight	Tolerances
1.2 oz [34 g]	±0.015" [±0.38mm]