



Model: AG-3000-60D

Table with specifications for Model AG-3000-60D, including Description, Operating Frequency, Insertion Loss, Attenuation Range, Control Function, etc.

Environmental Ratings:

Table with environmental ratings including Temperature, Humidity, Shock, Vibration, Altitude, and Temp. Shock.

Available Options:


(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

- List of available options including RF Connectors (B1, B2), Transfer Functions (F3), and Control Function Resolution (E1, R1, E2, R2, E3, E4).



Model: AG-3000-60D

Outline

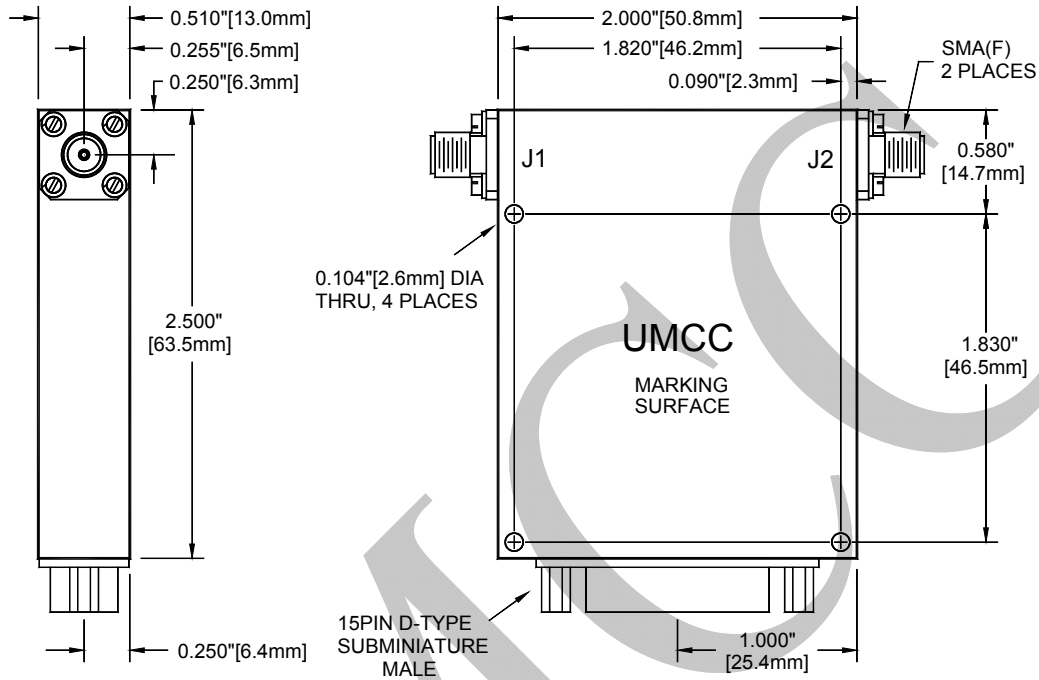

Weight	Tolerances
3.2 oz [90.7g]	±0.015" [±0.38mm]

Pin-Out Function

PIN	Function
1	N/C
2	N/C
3	N/C
4	N/C
5	0.25 dB
6	0.5 dB
7	1.0 dB
8	2.0 dB
9	4.0 dB
10	8.0 dB
11	16.0 dB
12	32.0 dB
13	+VDC
14	N/C
15	GND (Chassis & Digital)

