



Model: AG-4040-30V

Description:	Voltage Controlled PIN Attenuator
Operating Frequency:	40 – 4000 MHz
Insertion Loss (0dB Attn. Ref.):	2.6 dB Max
Attenuation Range:	0 - 30 dB Nominal
Attenuation Flatness:	0 – 10 dB 0.75 dB Peak-Peak Max
	>10 – 20 dB 1.6 dB Peak-Peak Max
	>20 – 30 dB 2.0 dB Peak-Peak Max
Control Function:	0 – 3V, 10dB/V, (Impedance = 5~10K)
Transfer Function Accuracy:	0 – 30 dB ±0.5 dB Max
VSWR (all settings):	1.6:1 Max
Settling Time (“±1dB of Target Setting”):	3µs Max (10µs<PW<0.1S)
Power Handling:	Operating +17 dBm CW/Peak Max
	Survival +30 dBm CW/Avg Max
Temperature Coefficient (Over Operating Range):	±0.025 dB/°C
Power Supply (internally regulated):	+12 to +15Vdc @ 120 mA Max
Connectors (RF):	SMA (female), Removable
Connector (Supply & Controls):	Solder Pins
Impedance:	50 Ohms Nominal
Quality:	Best-Commercial-Grade

Environmental Ratings:

Temperature:	{Operating: -40°C to +85°C} & {Storage: -50°C to +100°C}
Humidity:	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock:	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration:	MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude:	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock:	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:


(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

- RF Connectors
 - B1 [J1 SMA (male)]
 - B2 [All SMA (male)]
- Transfer Functions
 - F1 [Slope = 5dB/V , 0 – 6V Control]
 - F3 [Reverse Control Voltage (0V = Max Attenuation)]
- Control Connector
 - C1 [SMC (Jack), 50 Ω]
 - C2 [SMB (Jack), 50 Ω]
 - C3 [SMA (female)]



Model: AG-4040-30V

Outline

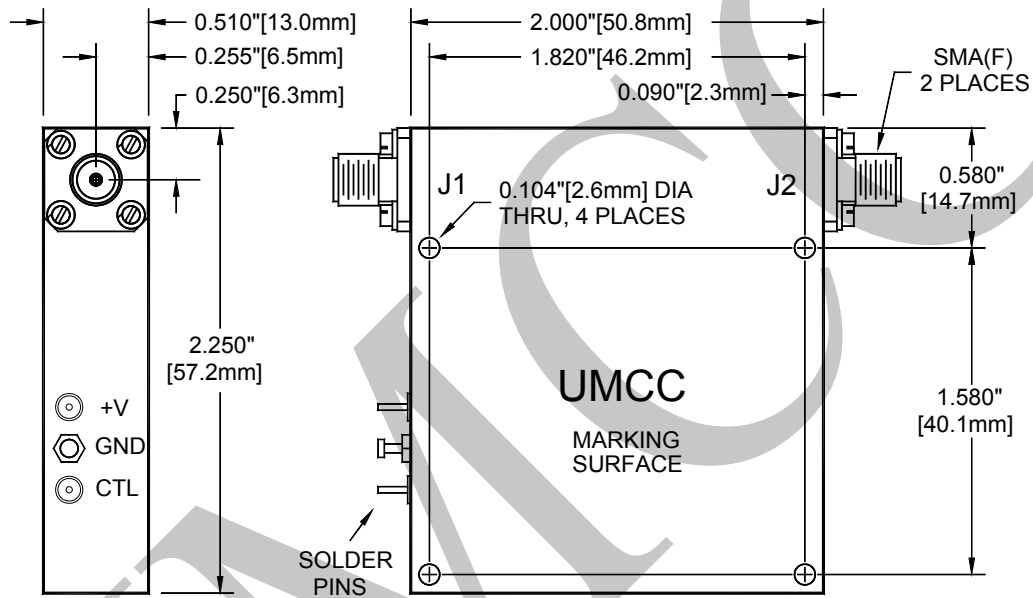

Weight	Tolerances
2.7 oz [77 g]	±0.015" [±0.38mm]