



Model: AT-L000-60V

Description:.....		Voltage Controlled PIN Attenuator
Operating Frequency:.....		1 – 8 GHz
Insertion Loss (0dB Attn. Ref.):.....		3.8 dB Max
Attenuation Range:.....		0 - 60 dB Nominal
Attenuation Flatness:.....	0 – 20 dB.....	0.8 dB Peak-Peak Max
.....	>20 – 30 dB.....	1.0 dB Peak-Peak Max
.....	>30 – 40 dB.....	1.2 dB Peak-Peak Max
.....	>40 – 60 dB.....	1.4 dB Peak-Peak Max
Control Function:.....		0 – 6V, 10dB/V, (Impedance = 5~10K)
Transfer Function Accuracy:.....	0 – 30 dB.....	±0.5 dB Max
.....	>30 – 60 dB.....	±1.0 dB Max
VSWR (all settings):.....		1.8:1 Max
Settling Time (“±1dB of Target Setting”):.....		3µs Max (10µs<PW<0.1S)
Power Handling:.....	Operating.....	+20 dBm CW/Peak Max
.....	Survival.....	+30 dBm CW/Avg Max
Temperature Coefficient (Over Operating Range):.....		±0.025 dB/°C
Power Supply (internally regulated):.....		+12 to +15Vdc @ 150 mA
.....		-12 to -15Vdc @ 60 mA
Connectors (RF):.....		SMA (female), Removable
Connector (Supply & Controls):.....		Solder Pins
Impedance:.....		50 Ohms Nominal
Quality:.....		Best-Commercial-Grade

Environmental Ratings:

Temperature:.....	{Operating: -40°C to +85°C} & {Storage: -50°C to +100°C}
Humidity:.....	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock:.....	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration:.....	MIL-STD-202F, Method 204D, Cond. B (.06” double amplitude, or 15G)
Altitude:.....	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock:.....	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:


(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

- RF Connectors
 - B1 [J1 SMA (male)]
 - B2 [All SMA (male)]
- Control Connector
 - C1 [SMC (Jack), 50 Ω]
 - C2 [SMB (Jack), 50 Ω]
 - C3 [SMA (female)]
- Control Impedance
 - D1 [50 Ω, Internally Terminated]
- Transfer Functions
 - F1 [Slope = 5dB/V , 0 – 12V Control]
 - F3 [Reverse Control Voltage (0V = Max Attenuation)]



Model: AT-L000-60V

Outline

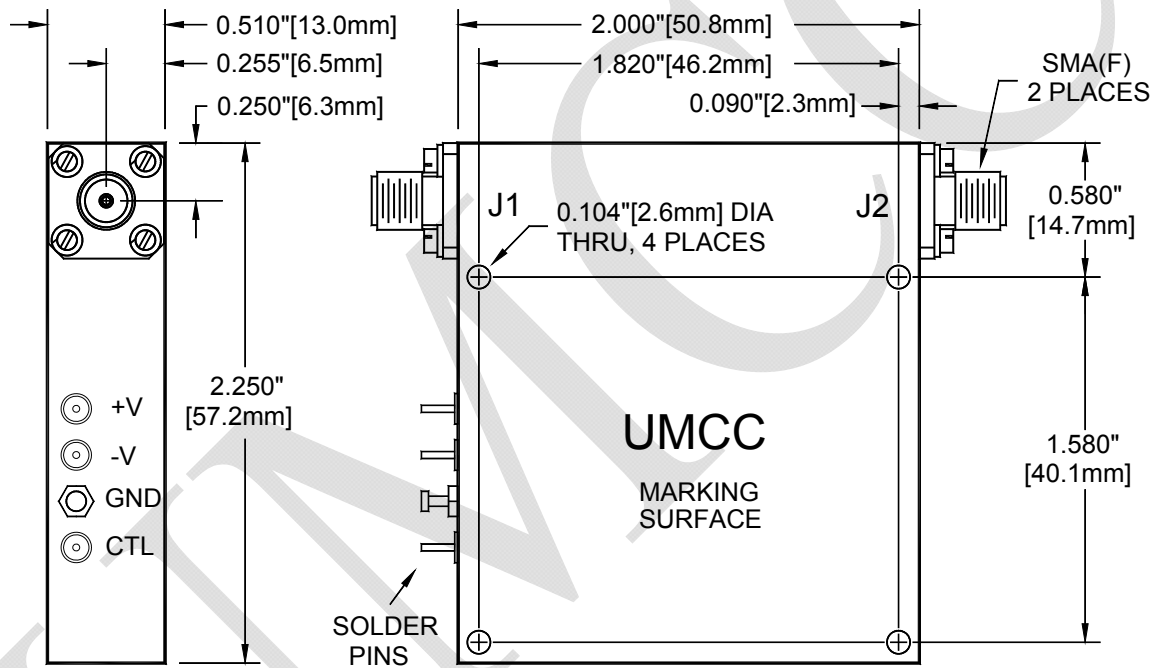

(Tolerances: ± 0.015 " [0.38mm] <> Weight = 2.7oz [77g])