




Model: BT-1150-N

Description:.....	Bias Tee
Operating Frequency:.....	150 KHz – 1000 MHz
Insertion Loss:	0.5 dB Max
Isolation DC to RF:	40dB Min
VSWR:.....	1.25:1 Max
Bias Voltage:.....	50 Volts Max
Bias Current	600 mA Max
Bias Frequency Bandwidth.....	DC-3 KHz
Power Handling:	10W CW/AVG
Bias DC Resistance:.....	1 Ohm
RF Connector:	N (female)
RF+DC Connector:.....	N (female)
Bias Connector:.....	Standard Solder-Pin
{Add suffix "B" for Bias Connector with BNC(F) <- Model: BT-1150-NB }	
Impedance:.....	50 Ohms Nominal
Quality:.....	Best-Commercial-Grade

Environmental Ratings:

Temperature:.....	{Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity:	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock:	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration:.....	MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude:.....	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock:.....	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Model: BT-1150-N ; { DC-Port with Solder Pin }

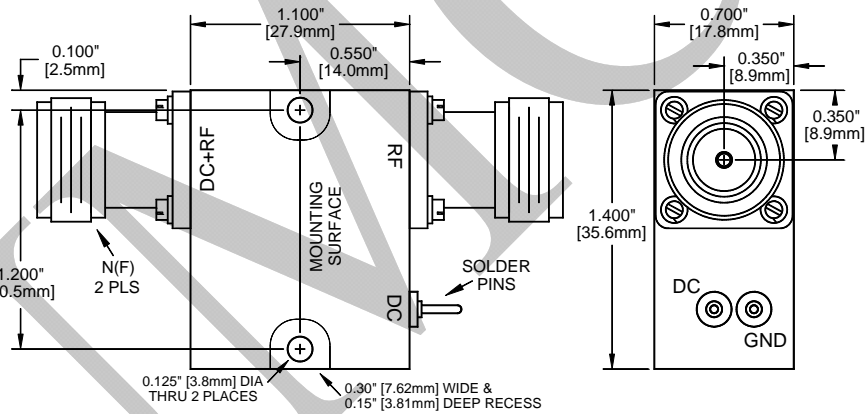

Model: BT-1150-NB ; { Option "B"; DC-Port with BNC(f) }

