



Model: BC-100A-11S

Description:..... 11dB Bi-Directional-Coupler
 Operating Frequency:..... 2 - 1000 MHz
 Coupling (reference to input):..... 11 ± 1 dB Nominal
 Coupling Flatness:..... ± 1 dB Max
 Insertion Loss (including coupled power):..... 3.4 dB Max

VSWR:


20 – 30 MHz	30 - 1000 MHz
1.7:1 Max	1.55:1 Max

Directivity:..... 17 dB Min
 Power Handling:..... 1W CW / Peak
 Connectors:..... SMA (f)
 Impedance:..... 50 Ohms Nominal
 Quality:..... Best-Commercial-Grade

Environmental Ratings:

Temperature:..... {Operating: -40°C to +85°C} & {Storage: -50°C to +100°C}
 Humidity:..... MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
 Shock:..... MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
 Vibration:..... MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
 Altitude:..... MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
 Temp. Shock:..... MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Outline

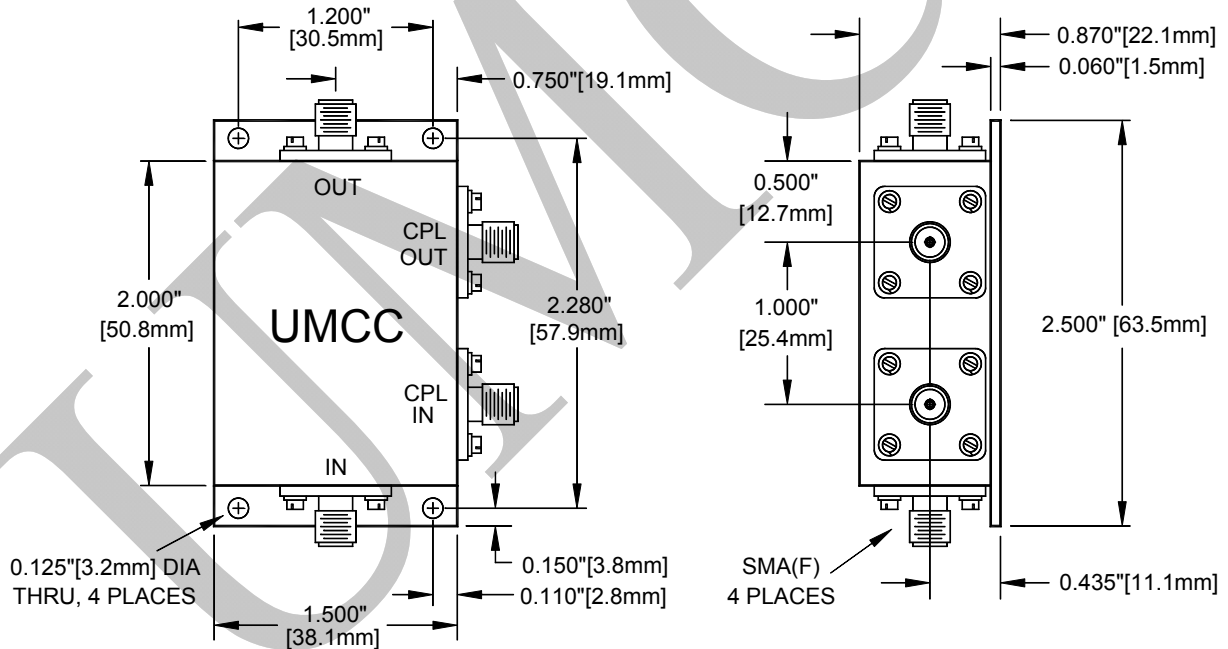

Weight
2.9 oz [82.2 g]