




**Model: BC-2000-30S**

Description:	30dB Bi-Directional Coupler
Operating Frequency:	10 - 2000 MHz
Coupling (reference to input):	30 ± 1.5 dB Nominal
Coupling Flatness:	± 1.7 dB Max
Insertion Loss (including coupled power):	2.2 dB Max
Directivity:	18 dB Min
VSWR: Line	1.35:1 Max
Couple	1.35:1 Max
Power Handling:	1W AVG/CW
Connectors:	SMA (f)
Impedance:	50 Ohm
Quality:	Best-Commercial-Grade

**Environmental Ratings:**

Temperature:	{Operating: -40°C to +85°C} & {Storage: -50°C to +100°C}
Humidity:	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock:	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration:	MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude:	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock:	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

**Outline**

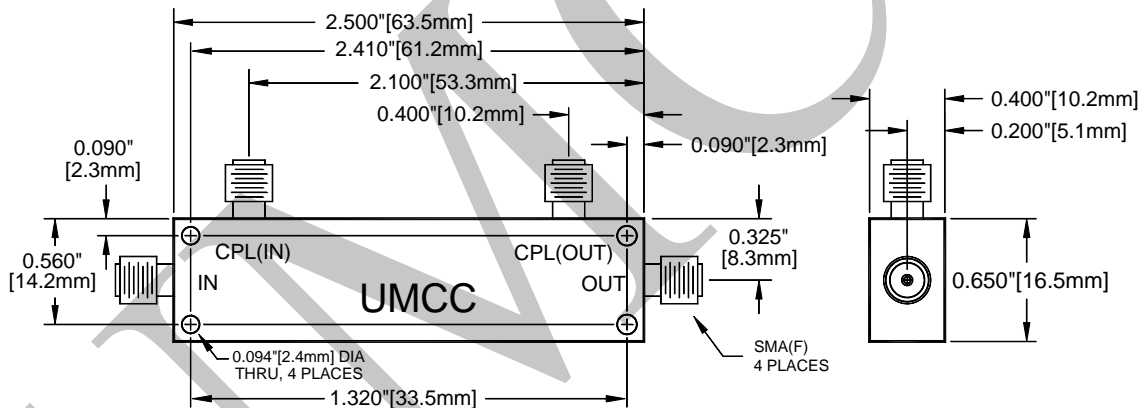

<b>Weight</b>
<b>0.9 oz [ 25.5 g]</b>