




**Model: BC-L000-20S**

Description:.....	20 dB Bi-Directional Coupler
Operating Frequency:.....	2 - 8 GHz
Coupling (reference to input):.....	20 ± 1 dB Nominal
Coupling Flatness:.....	± 0.8 dB Max
Total Insertion Loss (including coupled power):..	0.8 dB Max
Directivity: .....	15 dB Min
VSWR: .....	Line..... 1.40:1 Max
.....	Couple..... 1.35:1 Max
Power Handling: .....	50 W Cw/Avg Max
Connectors: .....	SMA (f)
Impedance:.....	50 Ω Nominal
Quality:.....	Best-Commercial-Grade

**Environmental Ratings:**

Temperature:.....	{Operating: -40°C to +85°C} & {Storage: -50°C to +100°C}
Humidity: .....	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock: .....	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration: .....	MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude: .....	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock: .....	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

**Outline**  
 ("A" = 4.600" [116.8mm])

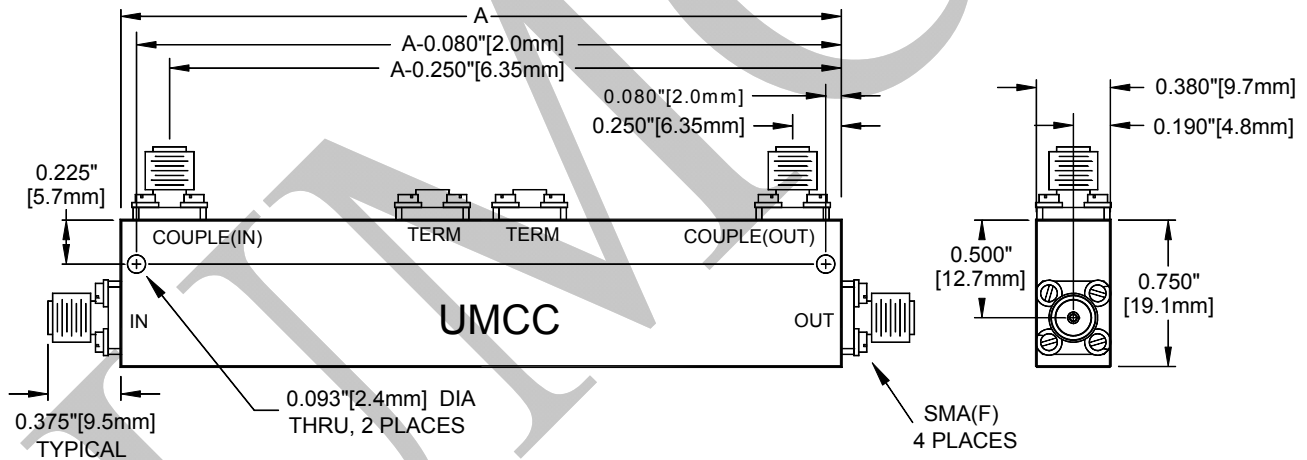

<b>Weight</b>
2.5 oz [70.9 g]