




**Model: DC-003S-30S**

Description:.....	30dB Directional Coupler
Operating Frequency:.....	10 KHz - 30 MHz
Coupling (reference to input):.....	30 ± 1 dB Nominal
Coupling Flatness:.....	± 0.5 dB Max
Insertion Loss (including coupled power):.....	1.3 dB Max
Directivity: .....	19 dB Min
VSWR:.....	1.35:1 Max
Power Handling: .....	2W CW / Peak
Connectors: .....	SMA (f)
Impedance:.....	50 Ohms Nominal
Quality:.....	Best-Commercial-Grade

**Environmental Ratings:**

Temperature:.....	{Operating: -40°C to +85°C} & {Storage: -50°C to +100°C}
Humidity: .....	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock: .....	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration: .....	MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude: .....	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock: .....	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

**Outline**

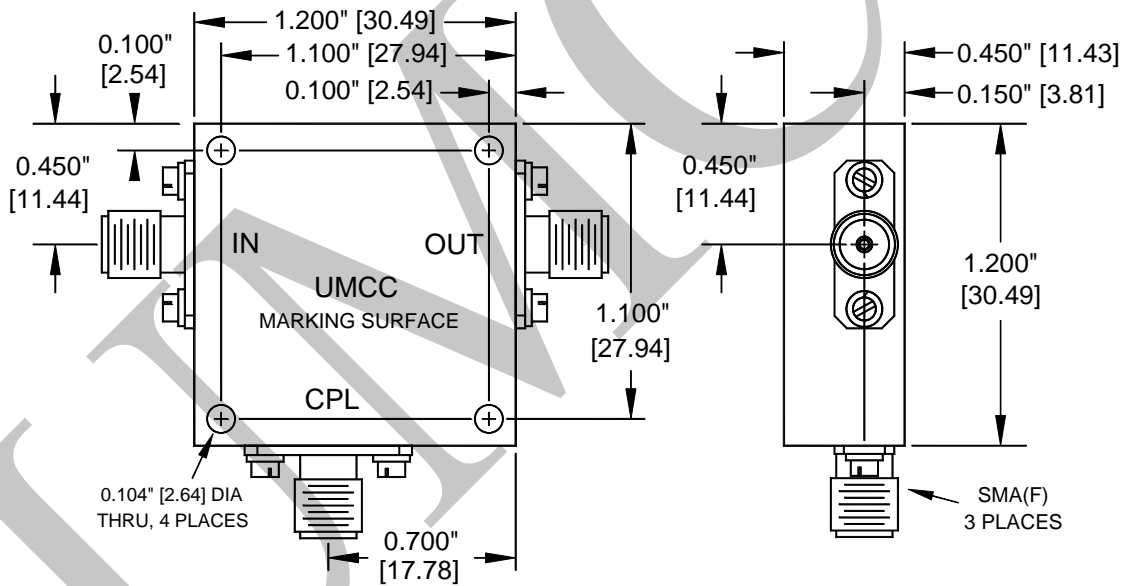

<b>Weight</b>
1.5 oz [ 43 g]