



Model: DC-050S-11S

Description: Directional Coupler
Operating Frequency:..... 1-500 MHz
Coupling (reference to input):..... 11 ± 1 dB Nominal
Coupling Flatness: ± 0.5 dB Max
Insertion Loss (including coupled power):

1-100 MHz	100-500 MHz
1.4 dB Max	1.7 dB Max

VSWR:

1-2 MHz	2-500 MHz
1.5:1 Max	1.35:1 Max

Directivity:


1-100 MHz	100-500 MHz
35 dB Min	25 dB Min

Power Handling: 1W CW / Peak
Connectors: SMA (f)
Impedance: 50Ω Nominal
Quality: Best-Commercial-Grade

Environmental Ratings:

Temperature: {Operating: -40°C to +85°C} & {Storage: -50°C to +100°C}
Humidity: MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration: MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Outline

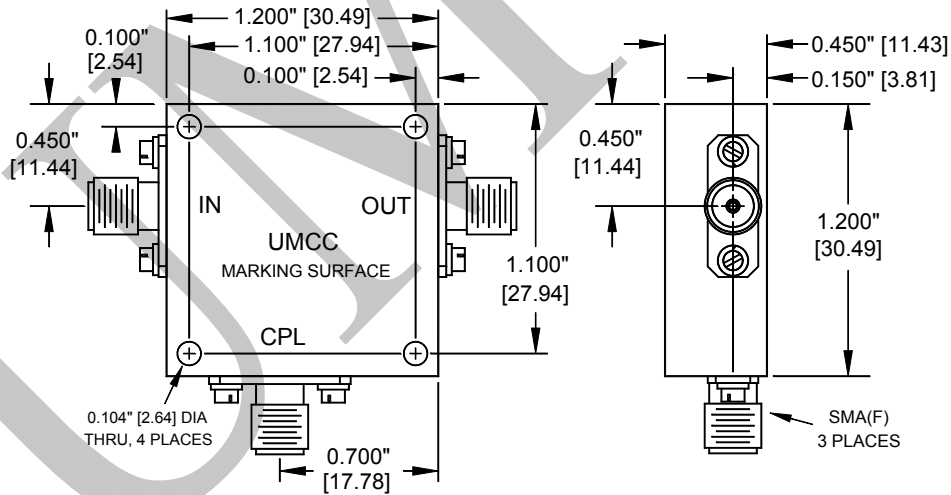

Weight
1.5 oz [43 g]