




Model: DC-N000-10S

Description:	Directional Coupler
Operating Frequency:	6 – 18 GHz
Coupling (reference to input):	10 ± 0.75dB Nominal
Coupling Flatness:	± 0.5 dB Max
Insertion Loss (including coupled power):	1.2 dB Max
Directivity:	18 dB Min (20~22dB Typical)
VSWR:	Line 1.35:1 Max
	Couple 1.35:1 Max
Power Handling:	Incident @ Input 30W Cw/Avg Max
	Incident @ Output 5W Cw/Avg Max
Connectors:	SMA (f)
Impedance:	50 Ω Nominal
Quality:	Best-Commercial-Grade

Environmental Ratings:

Temperature:	{Operating: -40°C to +85°C} & {Storage: -50°C to +100°C}
Humidity:	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock:	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration:	MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude:	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock:	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Outline
("A" = 1.475" [37.5mm])

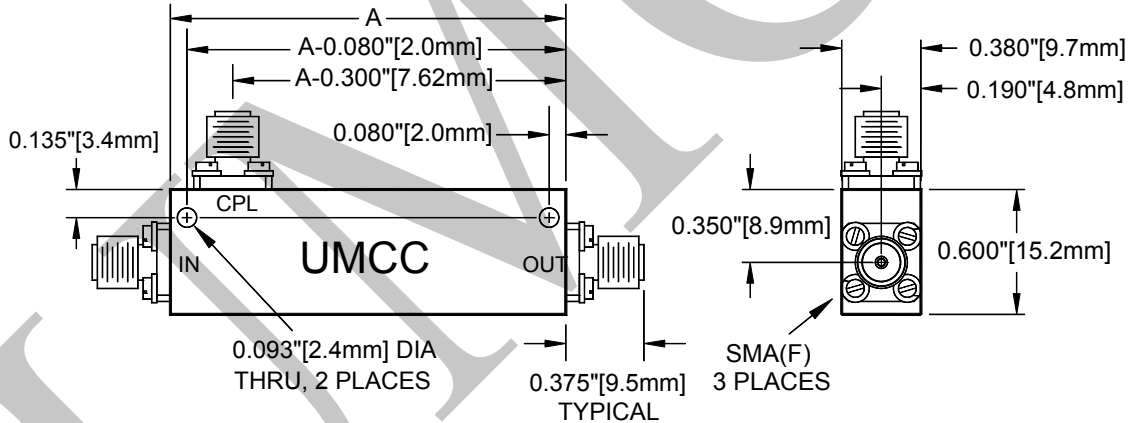

Weight	Tolerances
0.9 oz [25.5 g]	± 0.015" [± 0.38 mm]