



**Model: PD-0040-2B**

Description:..... 2-Way Power Divider  
 Operating Frequency:..... 10 KHz – 40 MHz  
 Insertion Loss:


10KHz - 10MHz	10-40 MHz
0.3 dB Min	0.7 dB Min

Isolation: ..... 26 dB Min  
 VSWR: ..... 1.4:1 Max  
 Amplitude Balance:..... ± 0.1 dB Max  
 Phase Balance:..... ± 1° Max  
 Power Handling (@ SUM-Port): ..... Matched Loads:..... 6W AVG/CW Max  
 ..... Unmatched Loads: ..... 2W AVG/CW Max  
 Connectors: ..... BNC (f)  
 Impedance: ..... 50 Ohms Nominal  
 Quality:..... Best-Commercial-Grade

**Environmental Ratings:**

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}  
 Humidity: ..... MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)  
 Shock: ..... MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)  
 Vibration: ..... MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)  
 Altitude: ..... MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)  
 Temp. Shock: ..... MIL-STD-202F, Method 107D, Cond. A (5 cycles)

**Outline**

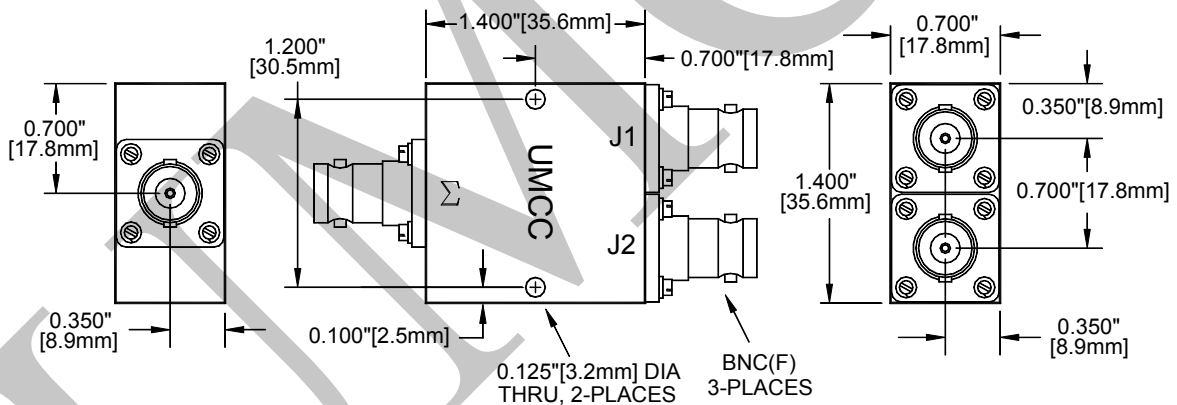

**Weight**

2.2 oz [ 62.4 g ]