



**Model: SR-SE00-TS**

Description:..... DPDT, PIN-Transfer-Switch

Operating Frequency:..... 1.5 – 19 GHz

Insertion Loss:

1.5 – 10 GHz	10 – 19 GHz
2.5 dB Max	3.5 dB Max

Isolation:

1.5 – 10 GHz	10 –19 GHz
80 dB Min	70 dB Min

VSWR (“ON” paths):..... 1.9:1 Max  
 Rise/Fall time (10% to 90% RF, 90% to 10% RF):..... 60 ns Max  
 On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF):..... 120 ns Max  
 Operating Power:..... CW&AVG..... +31dBm Max  
 ..... Peak:..... 15W @ 1µS PW Max  
 ..... PRF:..... 300KHz Max  
 Control Input Characteristics:..... TTL /Unit-Load, 1-Control / Floating-High  
 Control Logic:..... Logic “0” = RF Path J1 to J2 & J3 to J4  
 ..... Logic “1” = RF Path J1 to J4 & J3 to J2  
 Power Supplies:..... +5(±0.25)V @ 90mA Max  
 ..... -12(±0.5)V @ 110mA Max  
 Connectors (RF):..... SMA (f), Removable  
 Connectors (Supplies/Controls)..... Solder Pins  
 Impedance:..... 50 Ohms Nominal  
 Quality:..... Best-Commercial-Grade

**Environmental Ratings:**

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}  
 Humidity:..... MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)  
 Shock:..... MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)  
 Vibration:..... MIL-STD-202F, Method 204D, Cond. B (.06” double amplitude, or 15G)  
 Altitude:..... MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)  
 Temp. Shock:..... MIL-STD-202F, Method 107D, Cond. A (5 cycles)

**Available Options:**

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

- A1 [ +5(±0.25)V / -5(±0.25)V ]
- A2 [ +5(±0.25)V / -15(±0.5)V ]
- A3 [ +12(±0.5)V / -12(±0.5)V ]
- A4 [ +15(±0.5)V / -15(±0.5)V ]

■ **RF Connectors**

- B1 [ J1 & J3 Ports with SMA(M) ]
- B2 [ All SMA (M) ]
- B3 [ J2 & J4 Ports with SMA(M) ]

■ **Control Impedance**

- D1 [ 50Ω, Internally Terminated ]

■ **Control Function**

- F1 [ Inverse Logic, (“1” = Path “ON”) ]


■ **Video Suppression Filter**

- G1 [ VF @ J1 & J3 Ports <> 0.25 dB additional Loss ]
- G2 [ VF @ J2 & J4 Ports <> 0.25 dB additional Loss ]
- G3 [ VF @ All Ports <> 0.5 dB additional Loss ]



Model: SR-SE00-TS

**Outline**

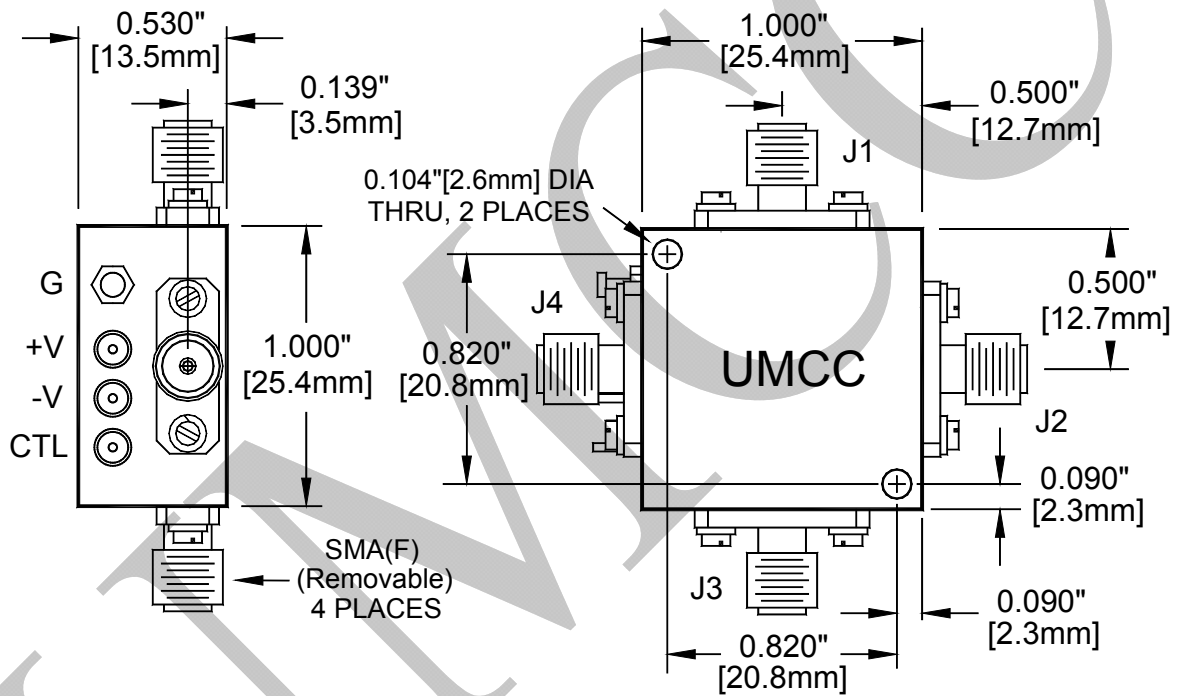

Weight	Tolerances
1.0 oz [28.4g]	±0.015" [±0.38mm]