



**Model: SR-DA00-1S**

Description:.....	SP1T, Reflective Pin-Switch
Operating Frequency:.....	0.2 - 4 GHz
Insertion Loss: .....	2.3 dB Max
Isolation: .....	75 dB Min
VSWR (RF Path "ON"): .....	1.6:1 Max
Rise/Fall time (10% to 90% RF, 90% to 10% RF): ...	120 ns Max
On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF):.....	220 ns Max
Operating Power:.....	CW / AVG ..... +27 dBm Max
.....	Peak: ..... 5W @ 1µS PW Max
Control Input Characteristics: .....	Std. TTL / Unit-Load / Floating-High
Control Logic:.....	1-Control, Logic "0" = RF Path "ON"
Power Supplies:.....	+5(±0.25) V @ 50mA Max
.....	-12(±0.5) V @ 60mA Max
Connectors (RF): .....	SMA (F), Removable
Connectors (Supplies & Controls) .....	Solder Pins
Impedance: .....	50 Ohms Nominal
Quality:.....	Best-Commercial-Grade

**Environmental Ratings:**

Temperature:.....	{Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity: .....	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock: .....	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration: .....	MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude: .....	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock: .....	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

**Available Options:**

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

- A1 [ +5(±0.25)V / -5(±0.25)V ]
- A2 [ +5(±0.25)V / -15(±0.5)V ]
- A3 [ +12(±0.5)V / -12(±0.5)V ]
- A4 [ +15(±0.5)V / -15(±0.5)V ]

■ **RF Connectors**

- B1 [ J1 SMA(M) / J2 SMA(F) ]
- B2 [ J1 SMA(F) / J2 SMA(M) ]
- B3 [ All SMA(M) ]

■ **Control Connectors**

- C1 [ SMC(Jack), 50 Ω ]
- C2 [ SMB(Jack), 50 Ω ]

■ **Control Impedance**

- D1 [ 50 Ω, Internally Terminated ]

■ **Control Function**

- F1 [ Inverse Logic, ("1" = Path "ON") ]


■ **Video Suppression Filter**

- G1 [ VF @ J2 Port <> 0.25 dB additional Loss ]
- G2 [ VF @ J1 & J2 Ports <> 0.5 dB additional Loss ]



Model: SR-DA00-1S

**Outline**

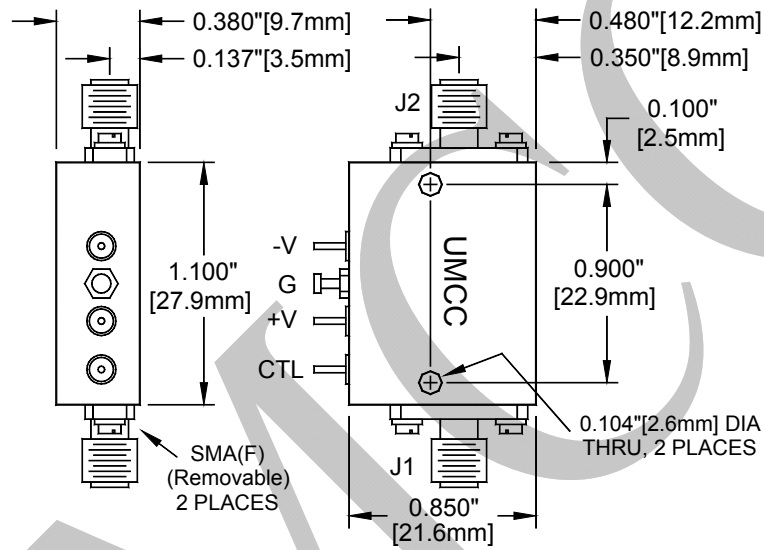

Weight	Tolerances
0.7 oz [19.8g]	±0.015" [±0.38mm]