



Model: SR-P01W-1S

Description: SP1T, Absorptive Pin-Switch
Operating Frequency: 2 - 20 GHz
Insertion Loss: 3.6 dB Max
Isolation:

Table with 2 columns: Frequency Range (2-12 GHz, 12-20 GHz) and Isolation (85 dB Min, 75 dB Min)

VSWR (RF Path "ON" or "OFF"): 1.8:1 Max
Rise/Fall time (10% to 90% RF, 90% to 10% RF): 300 ns Max
On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF): 400 ns Max
Operating Power: CW / AVG: +24 dBm Max
Peak: 5W @ 1µS PW Max
Control Input Characteristics: Std. TTL / Unit-Load / Floating-High
Control Logic: 1-Control, Logic "0" = RF Path "ON"
Power Supplies: +5(±0.25) V @ 60mA Max
-12(±0.5) V @ 75mA Max
Connectors (RF): SMA (F), Removable
Connectors (Supplies & Controls): Solder Pins
Impedance: 50 Ohms Nominal
Quality: Best-Commercial-Grade

Environmental Ratings:

Temperature: {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity: MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration: MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

Supply Voltages

- A1 [+5(±0.25)V / -5(±0.25)V] \*
A2 [+5(±0.25)V / -15(±0.5)V]
A3 [+12(±0.5)V / -12(±0.5)V]
A4 [+15(±0.5)V / -15(±0.5)V]

RF Connectors

- B1 [ J1 SMA(M) / J2 SMA(F) ]
B2 [ J1 SMA(F) / J2 SMA(M) ]
B3 [ All SMA(M) ]

Control Connectors

- C1 [ SMC(Jack), 50 Ω ]
C2 [ SMB(Jack), 50 Ω ]

Control Impedance

- D1 [ 50 Ω, Internally Terminated ]

Control Function

- F1 [ Inverse Logic, ("1" = Path "ON") ]

Video Suppression Filter


- G1 [ VF @ J2 Port <> 0.25 dB additional Loss ]
G2 [ VF @ J1 & J2 Ports <> 0.5 dB additional Loss ]

\* Recommended for Low Power Consumption <> Additional Switching Delay (ON/OFF time)



Model: SR-P01W-1S

Outline

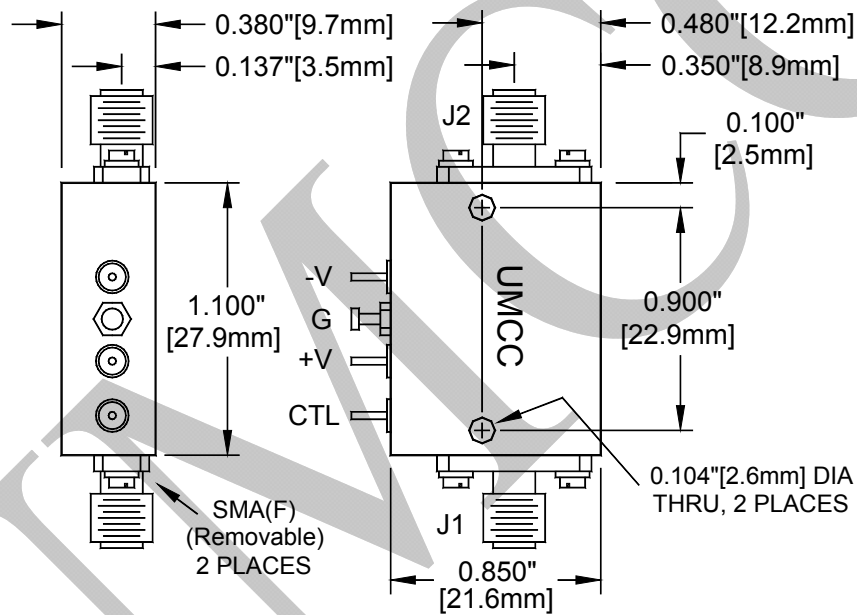

Weight	Tolerances
0.7 oz [19.8g]	±0.015" [±0.38mm]