



**Model: SR-T000-1S**

Description: ..... SP1T, Reflective Pin-Switch  
Operating Frequency:..... 1 - 18 GHz  
Insertion Loss:..... 2.4 dB Max  
Isolation:

1 - 2 GHz	2 - 18 GHz
65 dB Min	80 dB Min

VSWR (RF Path "ON"): ..... 1.7:1 Max  
Rise/Fall time (10% to 90% RF, 90% to 10% RF): ... 25 ns Max  
On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF): ..... 60 ns Max  
Operating Power: ..... CW / AVG ..... +30 dBm Max  
..... Peak:..... 20W @ 1µS PW Max  
Control Input Characteristics: ..... TTL / Unit-Load / Floating-High  
Control Logic: ..... 1-Control, Logic "0" = RF Path "ON"  
Power Supplies: ..... +5(±0.25) V @ 70mA Max  
..... -12(±0.5) V @ 50mA Max  
Connectors (RF):..... SMA (F), Removable  
Connectors (Supplies & Controls) ..... Solder Pins  
Impedance: ..... 50 Ω Nominal  
Quality: ..... Best-Commercial-Grade

**Environmental Ratings:**

Temperature: ..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}  
Humidity: ..... MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)  
Shock: ..... MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)  
Vibration:..... MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)  
Altitude:..... MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)  
Temp. Shock:..... MIL-STD-202F, Method 107D, Cond. A (5 cycles)

**Available Options:**

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

- A1\* [ +5(±0.25)V / -5(±0.25)V ]
- A2 [ +5(±0.25)V / -15(±0.5)V ]
- A3 [ +12(±0.5)V / -12(±0.5)V ]
- A4 [ +15(±0.5)V / -15(±0.5)V ]

■ **RF Connectors**

- B1 [ J1 SMA(M) / J2 SMA(F) ]
- B2 [ J1 SMA(F) / J2 SMA(M) ]
- B3 [ All SMA(M) ]

■ **Control Connectors**

- C1 [ SMC(Jack), 50 Ω ]
- C2 [ SMB(Jack), 50 Ω ]

■ **Control Impedance**

- D1 [ 50 Ω, Internally Terminated ]

■ **Control Function**

- F1 [ Inverse Logic, ("1" = Path "ON") ]

■ **Video Suppression Filter**


- G1 [ VF @ J2 Port <> 0.25 dB additional Loss ]
- G2 [ VF @ J1 & J2 Ports <> 0.5 dB additional Loss ]

\* Additional Switching Delay (ON/OFF time)



**Model: SR-T000-1S**

**Outline**

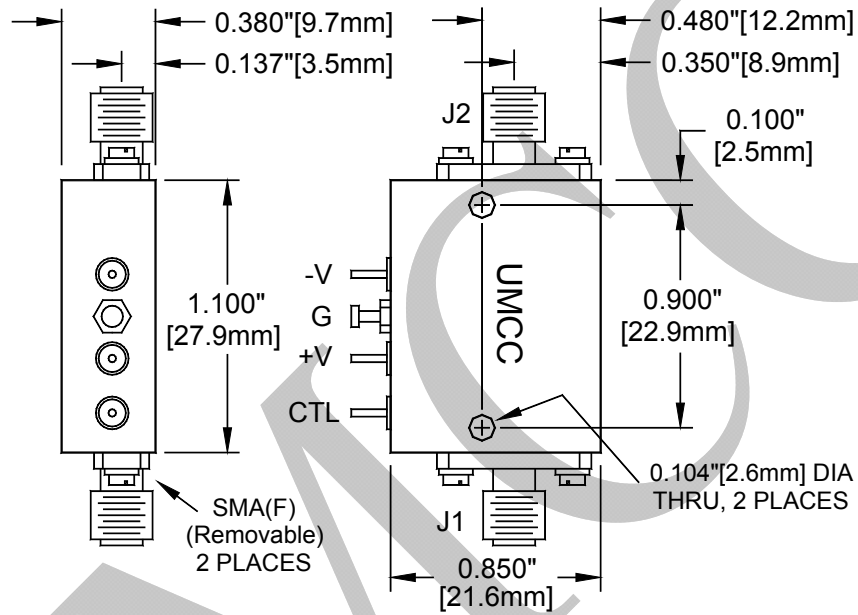

Weight	Tolerances
0.7 oz [19.8g]	±0.015" [±0.38mm]