



Model: SW-P200-3S

Description: SP3T, Reflective, PIN-Switch
 Operating Frequency:..... 2 – 20 GHz
 Insertion Loss:..... 2.4 dB Max
 Isolation (Arm-to-Arm):

2 – 14 GHz	14 –20 GHz
60 dB Min	50 dB Min

VSWR (“ON” paths):..... 1.7:1 Max
 Rise/Fall time (10% to 90% RF, 90% to 10% RF): ... 20 ns Max
 On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF): 60 ns Max
 Phase Balance (Deviation from Median):..... ±6° max
 Operating Power: CW&AVG..... +30dBm Max
 Peak:..... 10W @ 1µS PW Max
 Control Input Characteristics: TTL / Unit-Load / Floating-High
 Control Logic: 3-Controls, Logic “0” = RF Path “ON”
 Power Supplies: +5(±0.25)V @ 90mA Max
 -12(±0.5)V @ 60mA Max
 Connectors (RF):..... SMA (f), Removable
 Connectors (Supplies/Controls) Solder Pins
 Impedance: 50 Ω Nominal
 Quality: Best-Commercial-Grade

Environmental Ratings:

Temperature: {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
 Humidity:..... MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
 Shock:..... MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
 Vibration:..... MIL-STD-202F, Method 204D, Cond. B (.06” double amplitude, or 15G)
 Altitude:..... MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
 Temp. Shock:..... MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

- A1 [+5(±0.25)V / -5(±0.25)V] *
- A2 [+5(±0.25)V / -15(±0.5)V]
- A3 [+12(±0.5)V / -12(±0.5)V]
- A4 [+15(±0.5)V / -15(±0.5)V]

■ **RF Connectors**

- B1 [J1 – J3 Ports with SMA(M)]
- B2 [All SMA (M)]
- B3 [COM Port with SMA(M)]

■ **Control Function**

- F1 [Inverse Logic, (“1” = Path “ON”)]

■ **Video Suppression Filter**


- G1 [VF @ COM Port <> 0.25 dB additional Loss]
- G2 [VF @ J1 – J3 Ports <> 0.25 dB additional Loss]
- G3 [VF @ All Ports <> 0.5 dB additional Loss]

* Recommended for Low Power Consumption <> Additional 50ns Switching Delay (On/Off Time)



Model: SW-P200-3S

Outline

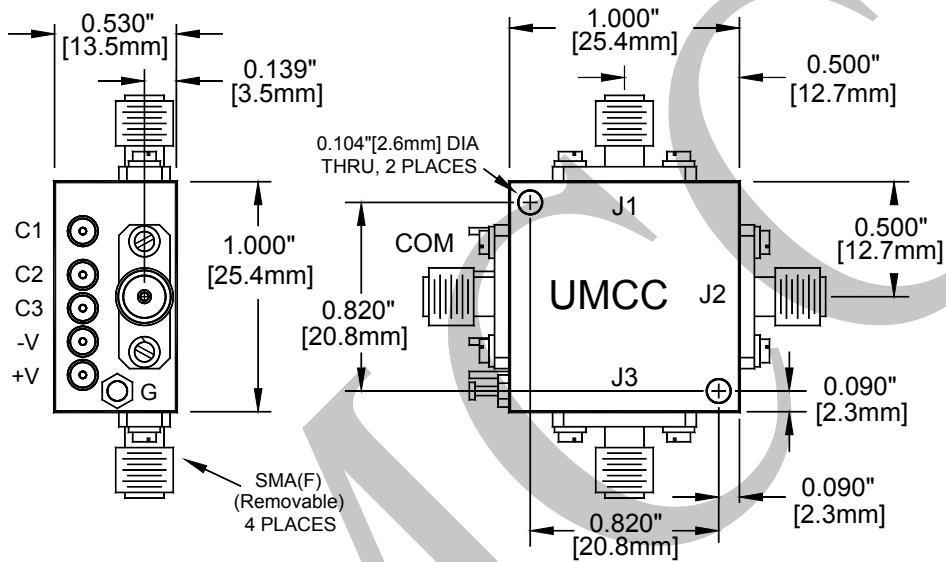

Weight	Tolerances
1.0 oz [28.4g]	±0.015" [±0.38mm]