



**Model: SR-P070-5S**

Description:.....	SP5T, Absorptive, PIN-Switch
Operating Frequency:.....	2 – 20 GHz
Insertion Loss: .....	3.8 dB Max
Isolation: .....	75 dB Min
VSWR (RF Path “ON” or “OFF”): .....	2:1 Max
Rise/Fall time (10% to 90% RF, 90% to 10% RF): ...	20 ns Max
On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF):.....	60 ns Max
Operating Power:.....	CW&AVG..... +24dBm Max
.....	Peak:..... 5W @ 1µS PW Max
Control Input Characteristics: .....	Std. TTL / Unit-Load / Floating-High
Control Logic:.....	5-Controls, Logic “0” = RF Path “ON”
Power Supplies:.....	+5(±0.25)V @ 160mA Max
.....	-12(±0.5)V @ 80mA Max
Connectors (RF): .....	SMA (f), Removable
Connectors (Supplies/Controls) .....	Solder Pins
Impedance: .....	50 Ohms Nominal
Quality:.....	Best-Commercial-Grade

**Environmental Ratings:**

Temperature:.....	{Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity: .....	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock: .....	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration: .....	MIL-STD-202F, Method 204D, Cond. B (.06” double amplitude, or 15G)
Altitude: .....	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock: .....	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

**Available Options:**

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

- A1 [ +5(±0.25)V / -5(±0.25)V ] \*
- A2 [ +5(±0.25)V / -15(±0.5)V ]
- A3 [ +12(±0.5)V / -12(±0.5)V ]
- A4 [ +15(±0.5)V / -15(±0.5)V ]

■ **RF Connectors**

- B1 [ J1 – J5 Ports with SMA(M) ]
- B2 [ All SMA (M) ]
- B3 [ COM Port with SMA(M) ]

■ **Control Function**

- F1 [ Inverse Logic, (“1” = Path “ON”) ]
- F2 [ 3-Bit Binary Controls + Enable ] ; see below for “Outline Drawing” and “Function Table”

■ **Video Suppression Filter**


- G1 [ VF @ COM Port <> 0.25 dB additional Loss ]
- G2 [ VF @ J1 – J5 Ports <> 0.25 dB additional Loss ]
- G3 [ VF @ All Ports <> 0.5 dB additional Loss ]

\* Recommended for Low Power Consumption <> Additional Switching Delay (ON/OFF time)



Model: SR-P070-5S

**Outline**

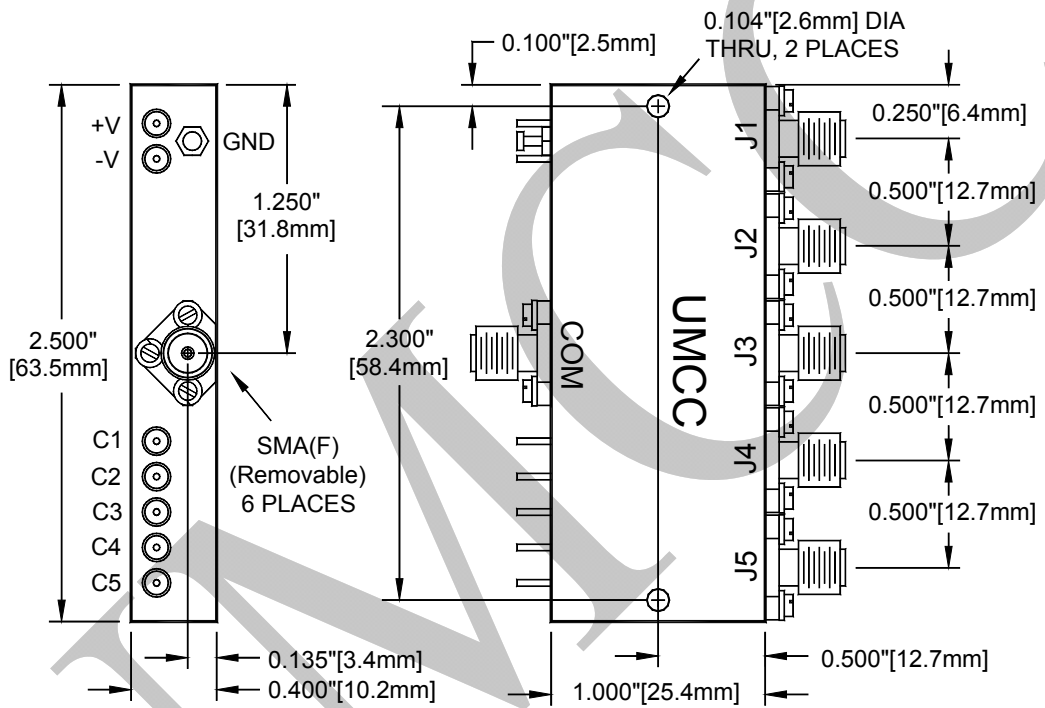


Weight	Tolerances
1.6 oz [45.4g]	±0.015" [±0.38mm]



Model: SR-P070-5S

**Outline Drawing (SP5T with Option "F2")**

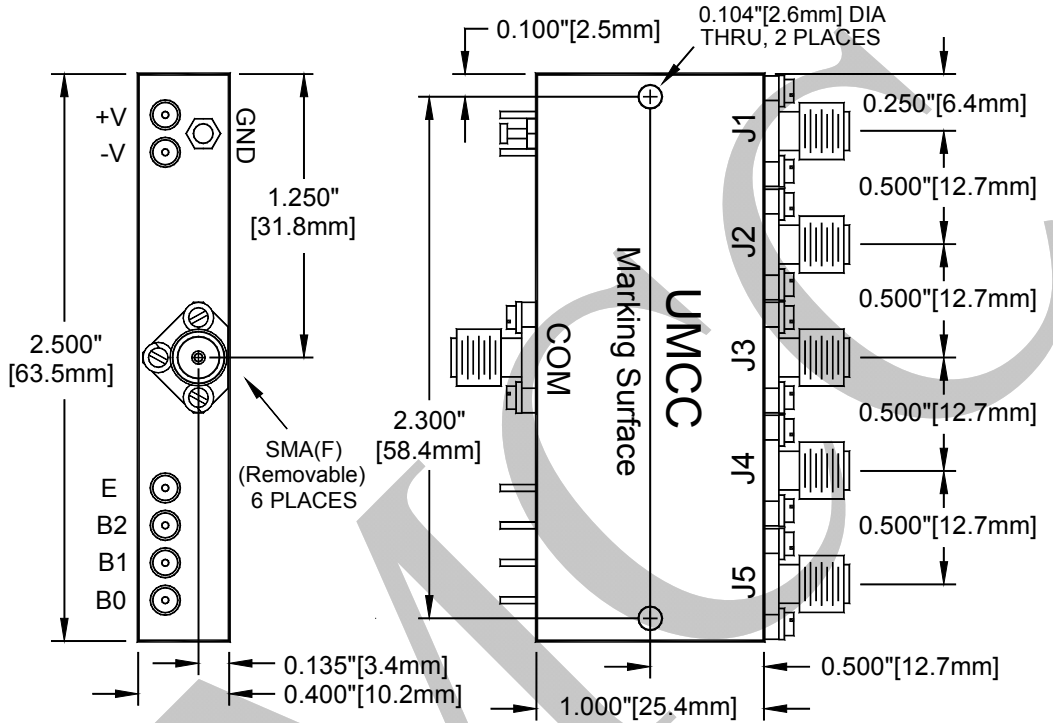

Weight	Tolerances
1.6 oz [45.4g]	±0.015" [±0.38mm]

**Function Table for Option "F2" (3-Bit Binary Control + Enable)**

INPUTS				RF PATH				
E	B2	B1	B0	J1	J2	J3	J4	J5
1	0	0	0	ON	OFF	OFF	OFF	OFF
1	0	0	1	OFF	ON	OFF	OFF	OFF
1	0	1	0	OFF	OFF	ON	OFF	OFF
1	0	1	1	OFF	OFF	OFF	ON	OFF
1	1	0	0	OFF	OFF	OFF	OFF	ON
0	X	X	X	OFF	OFF	OFF	OFF	OFF