



Model: SW-S070-5S

Table with 2 columns: Parameter and Value. Parameters include Description, Operating Frequency, Insertion Loss, Isolation, VSWR, Rise/Fall time, On/Off time, Phase Balance, Operating Power, Control Input Characteristics, Control Logic, Power Supplies, Connectors (RF), Connectors (Supplies/Controls), Impedance, and Quality.

Environmental Ratings:

Table with 2 columns: Parameter and Value. Parameters include Temperature, Humidity, Shock, Vibration, Altitude, and Temp. Shock.

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

Supply Voltages

- A1 [ +5(±0.25)V / -5(±0.25)V ] \*
A2 [ +5(±0.25)V / -15(±0.5)V ]
A3 [ +12(±0.5)V / -12(±0.5)V ]
A4 [ +15(±0.5)V / -15(±0.5)V ]

RF Connectors

- B1 [ J1 – J5 Ports with SMA(M) ]
B2 [ All SMA (M) ]
B3 [ COM Port with SMA(M) ]

Control Function

- F1 [ Inverse Logic, ("1" = Path "ON") ]
F2 [ 3-Bit Binary Controls + Enable ] ; see below for "Outline Drawing" and "Function Table"

Video Suppression Filter


- G1 [ VF @ COM Port <> 0.25 dB additional Loss ]
G2 [ VF @ J1 – J5 Ports <> 0.25 dB additional Loss ]
G3 [ VF @ All Ports <> 0.5 dB additional Loss ]

\* Recommended for Low Power Consumption <> Additional Switching Delay (ON/OFF time)



Model: SW-S070-5S

**Outline**

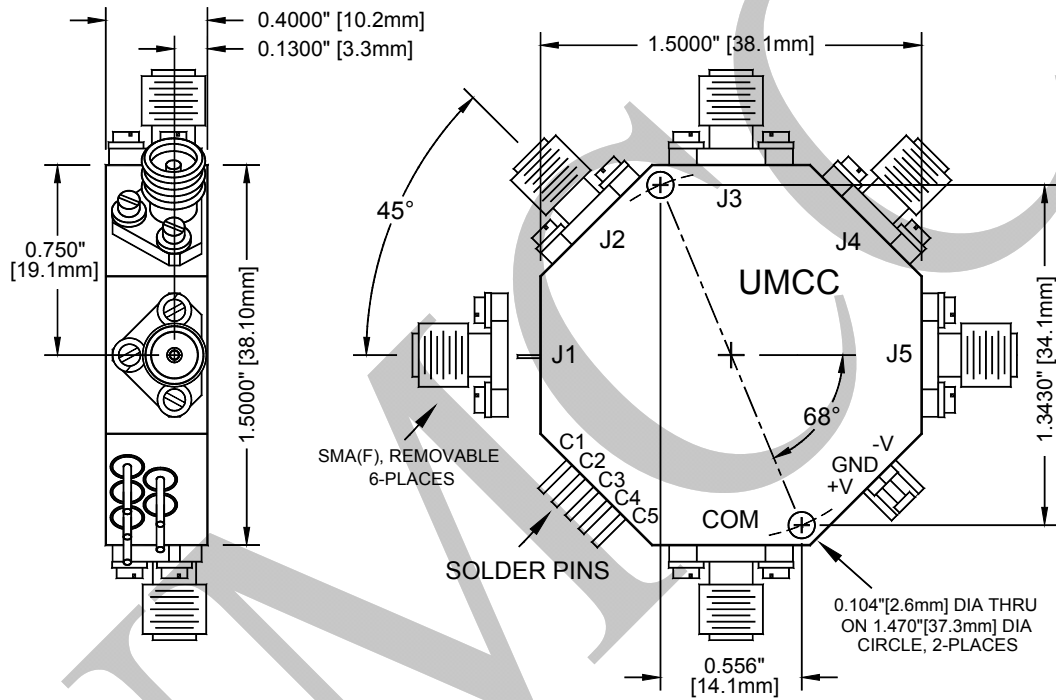


Weight	Tolerances
1.3 oz [36.9g]	±0.015" [±0.38mm]



Model: SW-S070-5S

**Outline Drawing (SP5T Radial with Option "F2")**

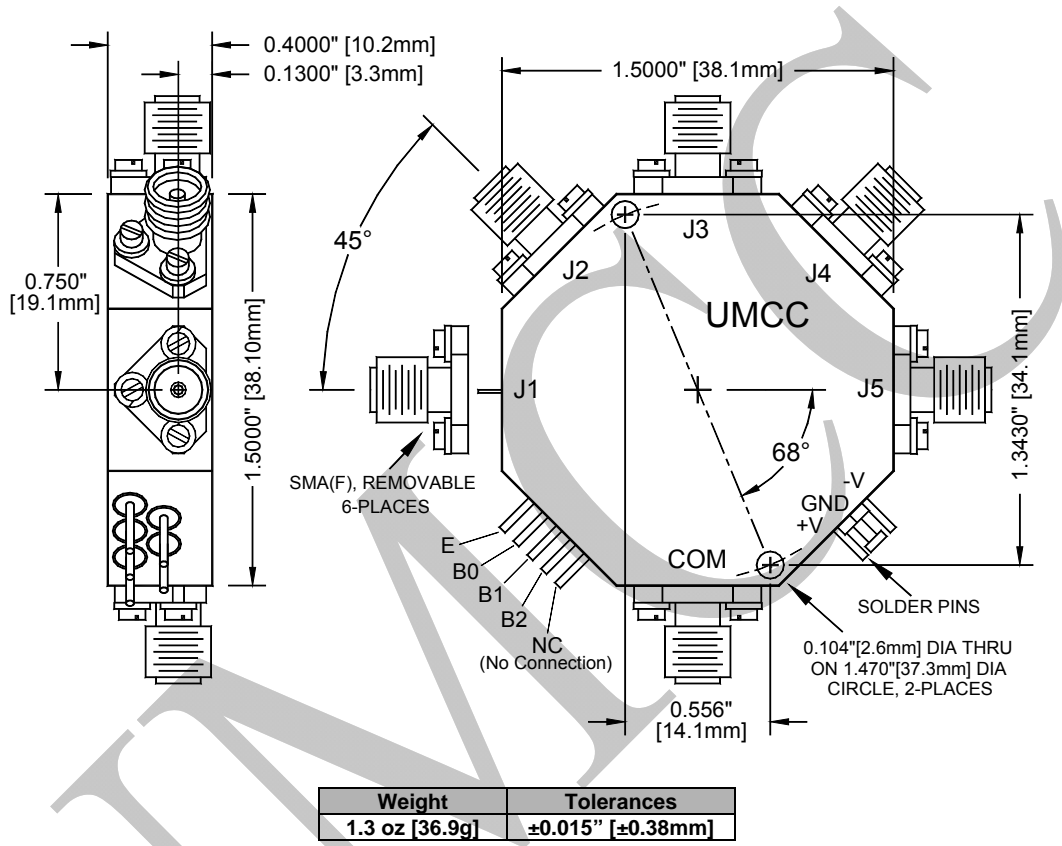

**Function Table for Option "F2" (3-Bit Binary Control + Enable)**

INPUTS				RF PATH				
E	B2	B1	B0	J1	J2	J3	J4	J5
1	0	0	0	ON	OFF	OFF	OFF	OFF
1	0	0	1	OFF	ON	OFF	OFF	OFF
1	0	1	0	OFF	OFF	ON	OFF	OFF
1	0	1	1	OFF	OFF	OFF	ON	OFF
1	1	0	0	OFF	OFF	OFF	OFF	ON
0	X	X	X	OFF	OFF	OFF	OFF	OFF