



Model: SW-U070-5S

Table with 2 columns: Parameter and Value. Parameters include Description, Operating Frequency, Insertion Loss, Isolation, VSWR, Rise/Fall time, On/Off time, Phase Balance, Operating Power, Control Input Characteristics, Control Logic, Power Supplies, Connectors (RF), Connectors (Supplies/Controls), Impedance, and Quality.

Environmental Ratings:

Table with 2 columns: Parameter and Value. Parameters include Temperature, Humidity, Shock, Vibration, Altitude, and Temp. Shock.

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

Supply Voltages

- A1 [+5(±0.25)V / -5(±0.25)V] *
A2 [+5(±0.25)V / -15(±0.5)V]
A3 [+12(±0.5)V / -12(±0.5)V]
A4 [+15(±0.5)V / -15(±0.5)V]

RF Connectors

- B1 [J1 – J5 Ports with SMA(M)]
B2 [All SMA (M)]
B3 [COM Port with SMA(M)]

Control Function

- F1 [Inverse Logic, ("1" = Path "ON")]
F2 [3-Bit Binary Controls + Enable] ; see below for "Outline Drawing" and "Function Table"

Video Suppression Filter


- G1 [VF @ COM Port <> 0.25 dB additional Loss]
G2 [VF @ J1 – J5 Ports <> 0.25 dB additional Loss]
G3 [VF @ All Ports <> 0.5 dB additional Loss]

* Recommended for Low Power Consumption <> Additional Switching Delay (ON/OFF time)



Model: SW-U070-5S

Outline

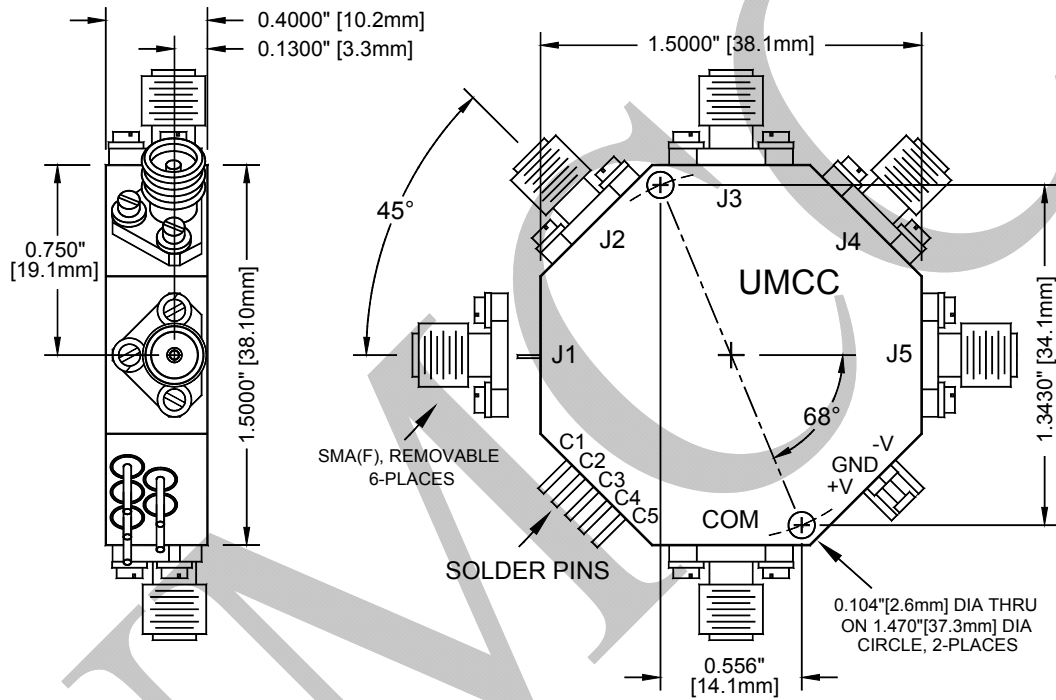


Weight	Tolerances
1.3 oz [36.9g]	±0.015" [±0.38mm]



Model: SW-U070-5S

Outline Drawing (SP5T Radial with Option "F2")

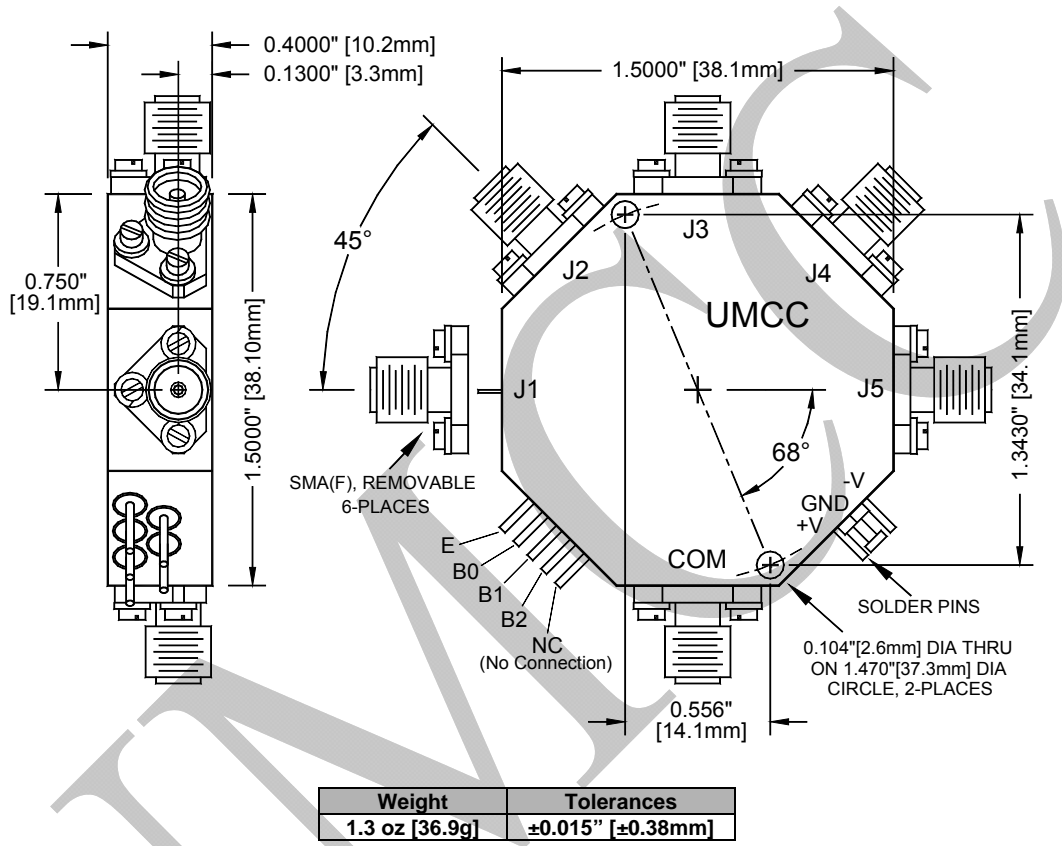

Function Table for Option "F2" (3-Bit Binary Control + Enable)

INPUTS				RF PATH				
E	B2	B1	B0	J1	J2	J3	J4	J5
1	0	0	0	ON	OFF	OFF	OFF	OFF
1	0	0	1	OFF	ON	OFF	OFF	OFF
1	0	1	0	OFF	OFF	ON	OFF	OFF
1	0	1	1	OFF	OFF	OFF	ON	OFF
1	1	0	0	OFF	OFF	OFF	OFF	ON
0	X	X	X	OFF	OFF	OFF	OFF	OFF