



Model: SR-S070-7S

Description: SP7T, Absorptive, PIN-Switch
Operating Frequency: 2 - 18 GHz
Insertion Loss: 4.2 dB Max
Isolation (Arm-to-Arm):

Table with 2 columns: Frequency Range (2-15 GHz, 15-18 GHz) and Isolation (75 dB Min, 65 dB Min)

VSWR (RF Path "ON" or "OFF"): 2:1 Max
Rise/Fall time (10% to 90% RF, 90% to 10% RF): 50 ns Max
On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF): 90 ns Max
Operating Power: CW&AVG: +24 dBm Max
Peak: 5W @ 1µS PW & 10% Duty-Cycle Max
Control Input Characteristics: Std. TTL / Unit-Load / Floating-High
Control Logic: 7-Controls, Logic "0" = RF Path "ON"
Power Supplies: +5(±0.25)V @ 240mA Max
-12(±0.5)V @ 90mA Max
Connectors (RF): SMA (f), Removable
Connectors (Supplies/Controls): Solder Pins
Impedance: 50 Ohms Nominal
Quality: Best-Commercial-Grade

Environmental Ratings:

Temperature: {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity: MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration: MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

Supply Voltages

- A1 [ +5(±0.25)V / -5(±0.25)V ] \*
A2 [ +5(±0.25)V / -15(±0.5)V ]
A3 [ +12(±0.5)V / -12(±0.5)V ]
A4 [ +15(±0.5)V / -15(±0.5)V ]

RF Connectors

- B1 [ J1 - J7 Ports with SMA(M) ]
B2 [ All SMA (M) ]
B3 [ COM Port with SMA(M) ]

Control Function

- F1 [ Inverse Logic, ("1" = Path "ON") ]
F2 [ 3-Bit Binary Controls + Enable ] ; see below for "Outline Drawing" and "Function Table"

Video Suppression Filter


- G1 [ VF @ COM Port <> 0.25 dB additional Loss ]
G2 [ VF @ J1 - J7 Ports <> 0.25 dB additional Loss ]
G3 [ VF @ All Ports <> 0.5 dB additional Loss ]

\* Recommended for Low Power Consumption <> Additional Switching Delay (ON/OFF time)



Model: SR-S070-7S

**Outline**

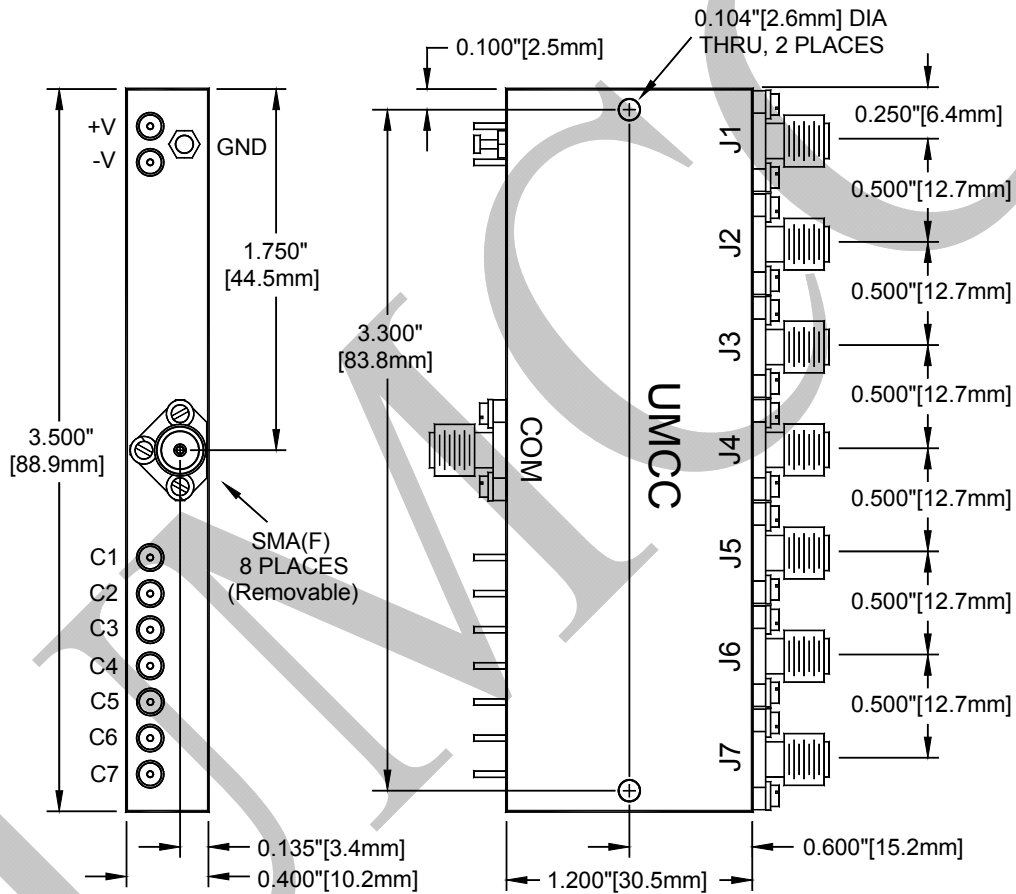


Weight	Tolerances
2.5 oz [70.9g]	±0.015" [±0.38mm]



Model: SR-S070-7S

Outline Drawing (SP7T with Option "F2")

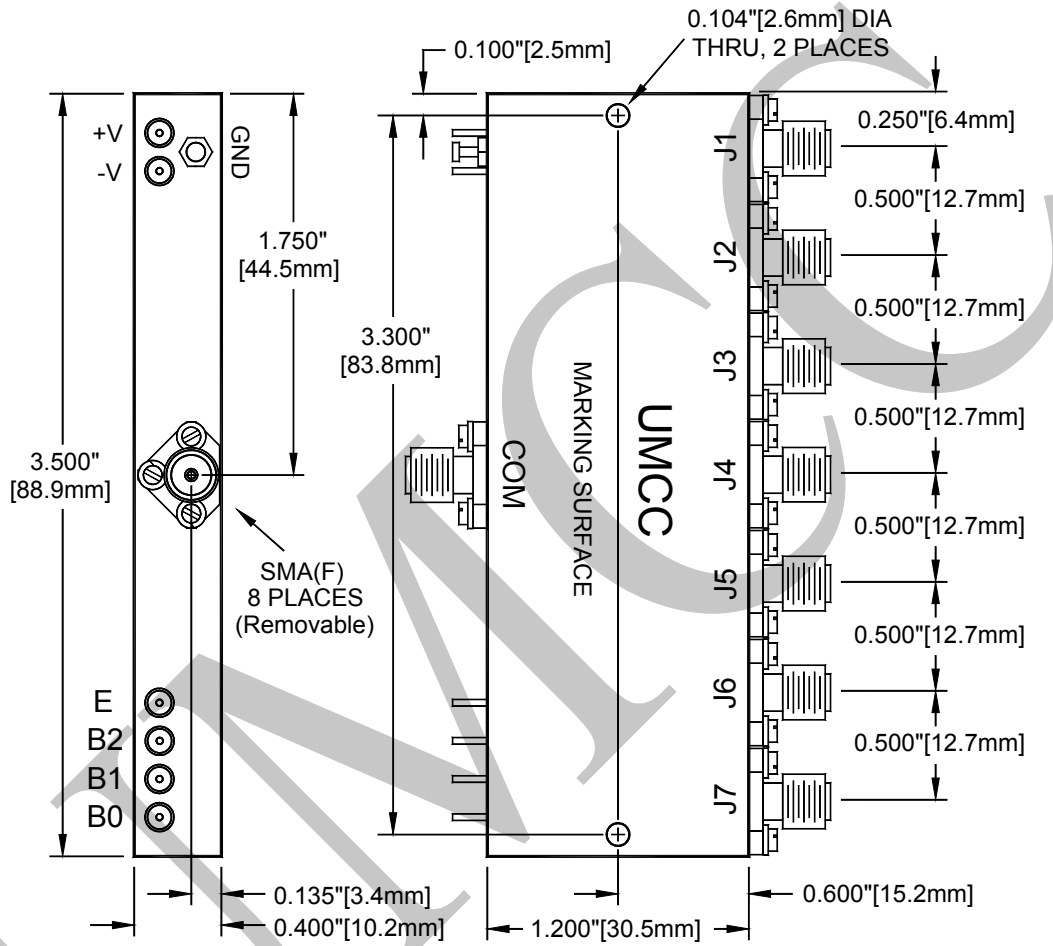

Weight	Tolerances
2.5 oz [70.9g]	±0.015" [±0.38mm]

Function Table for Option "F2" (3-Bit Binary Control + Enable)

INPUTS				RF PATH						
E	B2	B1	B0	J1	J2	J3	J4	J5	J6	J7
0	0	0	0	ON	OFF	OFF	OFF	OFF	OFF	OFF
0	0	0	1	OFF	ON	OFF	OFF	OFF	OFF	OFF
0	0	1	0	OFF	OFF	ON	OFF	OFF	OFF	OFF
0	0	1	1	OFF	OFF	OFF	ON	OFF	OFF	OFF
0	1	0	0	OFF	OFF	OFF	OFF	ON	OFF	OFF
0	1	0	1	OFF	OFF	OFF	OFF	OFF	ON	OFF
0	1	1	0	OFF	OFF	OFF	OFF	OFF	OFF	ON
1	X	X	X	OFF	OFF	OFF	OFF	OFF	OFF	OFF



*Universal Microwave Components Corp.*  
5702-D General Washington Drive Alexandria, VA 22312 <> Web: [www.umcc111.com](http://www.umcc111.com)  
E-mail: [sales@umcc111.com](mailto:sales@umcc111.com) <> Tel: (703) 642-6332 <> Fax: (703) 642-2568

**Model: SR-S070-7S**

UMCC