



Model: SW-V000-8S

Description:..... SP8T, Reflective, PIN-Switch
 Operating Frequency:..... 0.1 – 18 GHz
 Insertion Loss: 4.6 dB Max
 Isolation:

0.1 –15 GHz	15 –18 GHz
70 dB Min	65 dB Min

VSWR (“ON” paths):..... 2:1 Max
 Rise/Fall time (10% to 90% RF, 90% to 10% RF): ... 50 ns Max
 On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF):..... 150 ns Max
 Phase Balance (Deviation from Median):..... ±9° max
 Operating Power:..... CW / AVG +30 dBm Max *
 * {+27dbm Max below 300MHz}
 Peak: 5W @ 1µS PW & 10% Duty-Cycle Max
 Control Input Characteristics: Std. TTL / Unit-Load / Floating-High
 Control Logic:..... 8-Controls, Logic “0” = RF Path “ON”
 Power Supplies:..... +5(±0.25)V @ 260mA Max
 -12(±0.5)V @ 110mA Max
 Connectors (RF):..... SMA (f), Removable
 Connectors (Supplies/Controls) Solder Pins
 Impedance: 50 Ohms Nominal
 Quality:..... Best-Commercial-Grade

Environmental Ratings:

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
 Humidity: MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
 Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
 Vibration: MIL-STD-202F, Method 204D, Cond. B (.06” double amplitude, or 15G)
 Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
 Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

- A2 [+5(±0.25)V / -15(±0.5)V]
- A3 [+12(±0.5)V / -12(±0.5)V]
- A4 [+15(±0.5)V / -15(±0.5)V]

■ **RF Connectors**

- B1 [J1 – J8 Ports with SMA(M)]
- B2 [All SMA (M)]
- B3 [COM Port with SMA(M)]


■ **Control Function**

- F1 [Inverse Logic, (“1” = Path “ON”)]



Model: SW-V000-8S

Outline

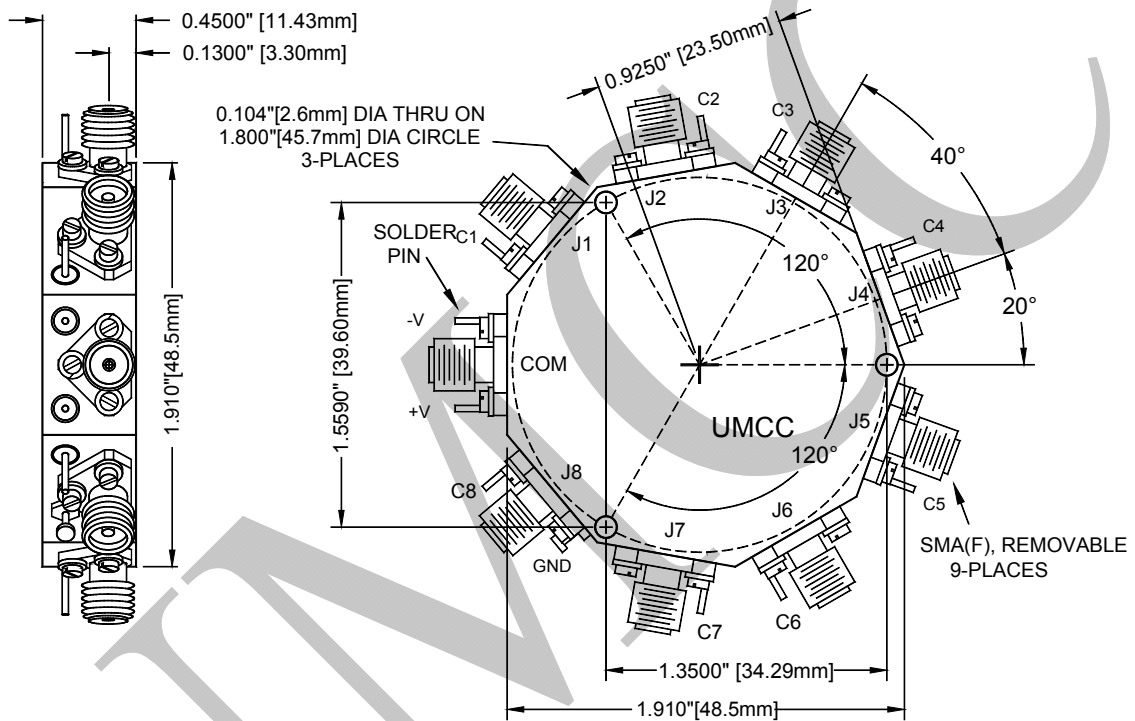

Weight	Tolerances
1.85 oz [52.4g]	±0.015" [±0.38mm]