




SR-XXXX-5S-F2 (Option with 3-Bit Binary Decoder)

**Outline Drawing (SP5T with Option "F2")**

**Fig. 3**

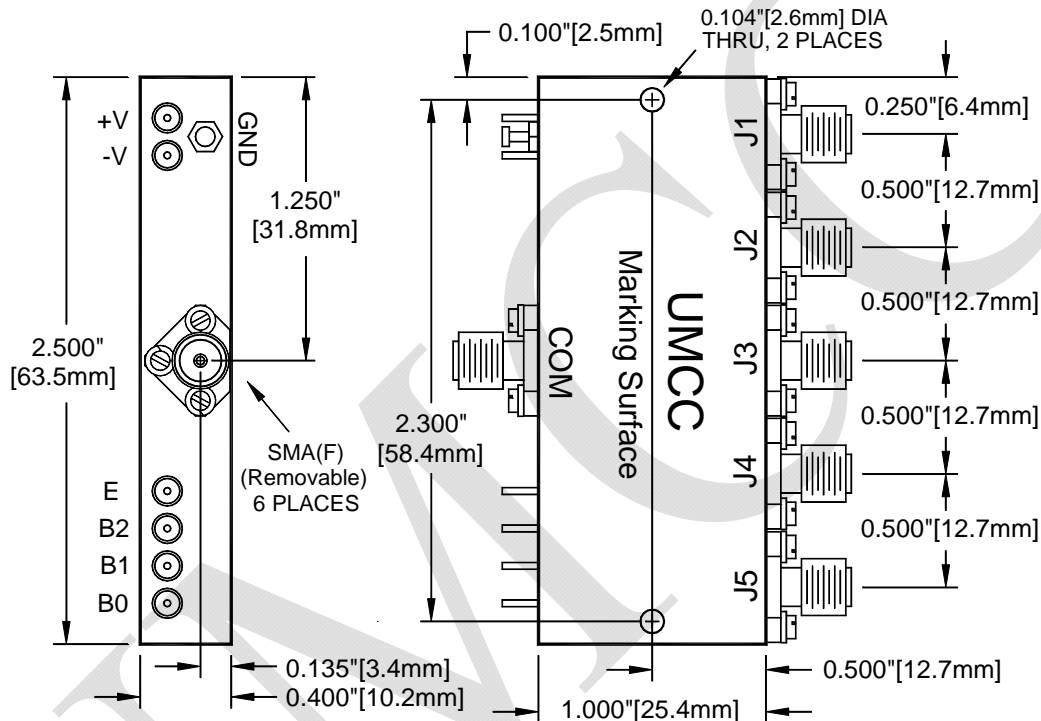

Weight	Tolerances
1.6 oz [45.4g]	±0.015" [±0.38mm]

**Function Table for Option "F2" (3-Bit Binary Control + Enable)**

INPUTS				RF PATH				
E	B2	B1	B0	J1	J2	J3	J4	J5
1	0	0	0	ON	OFF	OFF	OFF	OFF
1	0	0	1	OFF	ON	OFF	OFF	OFF
1	0	1	0	OFF	OFF	ON	OFF	OFF
1	0	1	1	OFF	OFF	OFF	ON	OFF
1	1	0	0	OFF	OFF	OFF	OFF	ON
0	X	X	X	OFF	OFF	OFF	OFF	OFF