




SR-XXXX-7S-F2 (Option with 3-Bit Binary Decoder)

Outline Drawing (SP7T with Option "F2")

Fig. 3

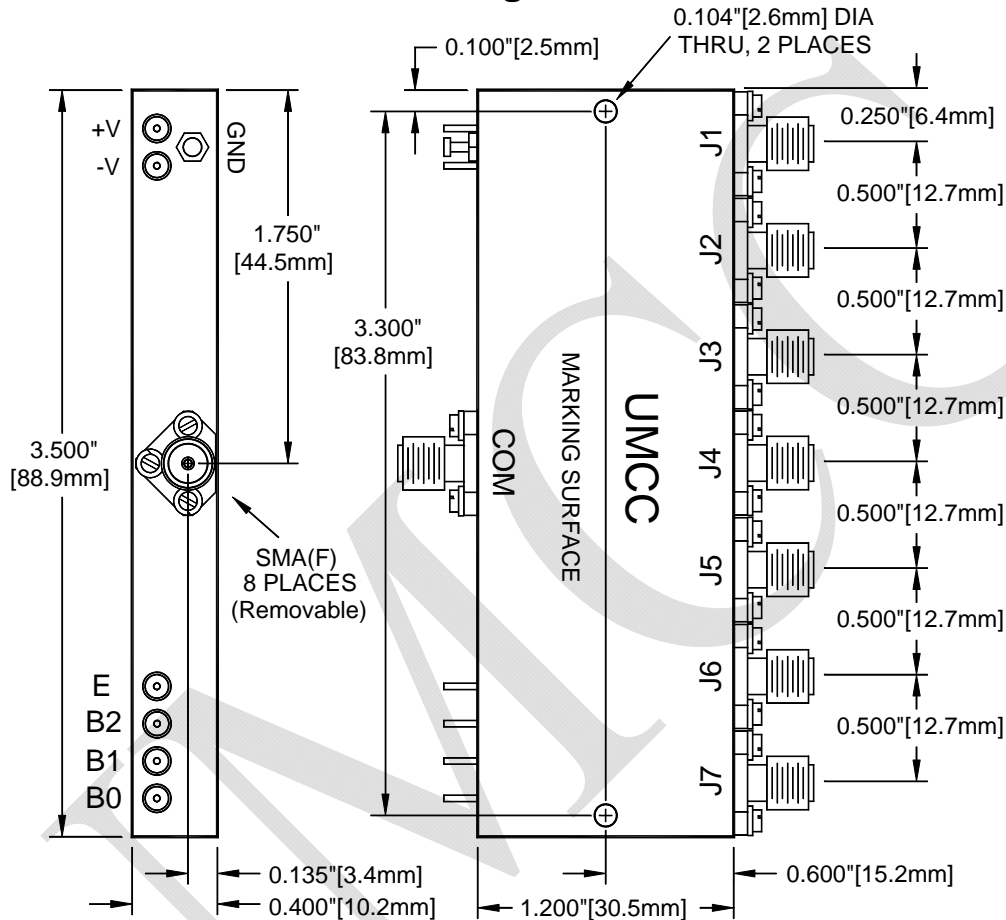

Weight	Tolerances
2.5 oz [70.9g]	±0.015" [±0.38mm]

Function Table for Option "F2" (3-Bit Binary Control + Enable)

INPUTS				RF PATH						
E	B2	B1	B0	J1	J2	J3	J4	J5	J6	J7
0	0	0	0	ON	OFF	OFF	OFF	OFF	OFF	OFF
0	0	0	1	OFF	ON	OFF	OFF	OFF	OFF	OFF
0	0	1	0	OFF	OFF	ON	OFF	OFF	OFF	OFF
0	0	1	1	OFF	OFF	OFF	ON	OFF	OFF	OFF
0	1	0	0	OFF	OFF	OFF	OFF	ON	OFF	OFF
0	1	0	1	OFF	OFF	OFF	OFF	OFF	ON	OFF
0	1	1	0	OFF	OFF	OFF	OFF	OFF	OFF	ON
1	X	X	X	OFF	OFF	OFF	OFF	OFF	OFF	OFF