



Model: SR-J440-16S

Description: SP16T, Reflective, PIN-Switch
Operating Frequency: 0.5 – 14 GHz
Insertion Loss: 4.9 dB Max
Isolation:

Table with 2 columns: 0.5 – 12.4 GHz, 12.4 – 14 GHz. Row 1: 55 dB Min, 50 dB Min

VSWR ("ON" paths): 1.9:1 Max
Rise/Fall time (10% to 90% RF, 90% to 10% RF): 40 ns Max
On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF): 90 ns Max
Operating Power: CW&AVG: +27dBm Max, Peak: 5W @ 1µS PW Max
Control Input Characteristics: TTL / Unit-Load / Floating-High
Control Logic: 16-Controls, "0"= RF Path "ON"
Power Supplies: +5(±0.25)V @ 200mA Max, -12(±0.5)V @ 150mA Max
Connectors (RF): SMA (f), Removable
Connectors (Supplies/Controls): Solder Pins
Impedance: 50 Ω Nominal
Quality: Best-Commercial-Grade

Environmental Ratings:

Temperature: {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity: MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration: MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

Supply Voltages

- A1 [ +5(±0.25)V / -5(±0.25)V ] \*
A2 [ +5(±0.25)V / -15(±0.5)V ]

Control Function

- F1 [ Inverse Logic, ("1" = Path "ON") ]
F2 [ 4-Bit Binary Controls + Enable ] ; see below for "Outline Drawing" and "Function Table"

RF Connectors

- B1 [ J1 – J16 Ports with SMA(M) ]
B2 [ All SMA (M) ]
B3 [ COM Port with SMA(M) ]

Video Suppression Filter


- G1 [ VF @ COM Port <> 0.25 dB additional Loss ]
G2 [ VF @ J1 – J16 Ports <> 0.25 dB additional Loss ]
G3 [ VF @ All Ports <> 0.5 dB additional Loss ]

\* Recommended for Low Power Consumption <> Additional Switching Delay (ON/OFF time)



Model: SR-J440-16S

**Outline (Standard 16 Controls)**

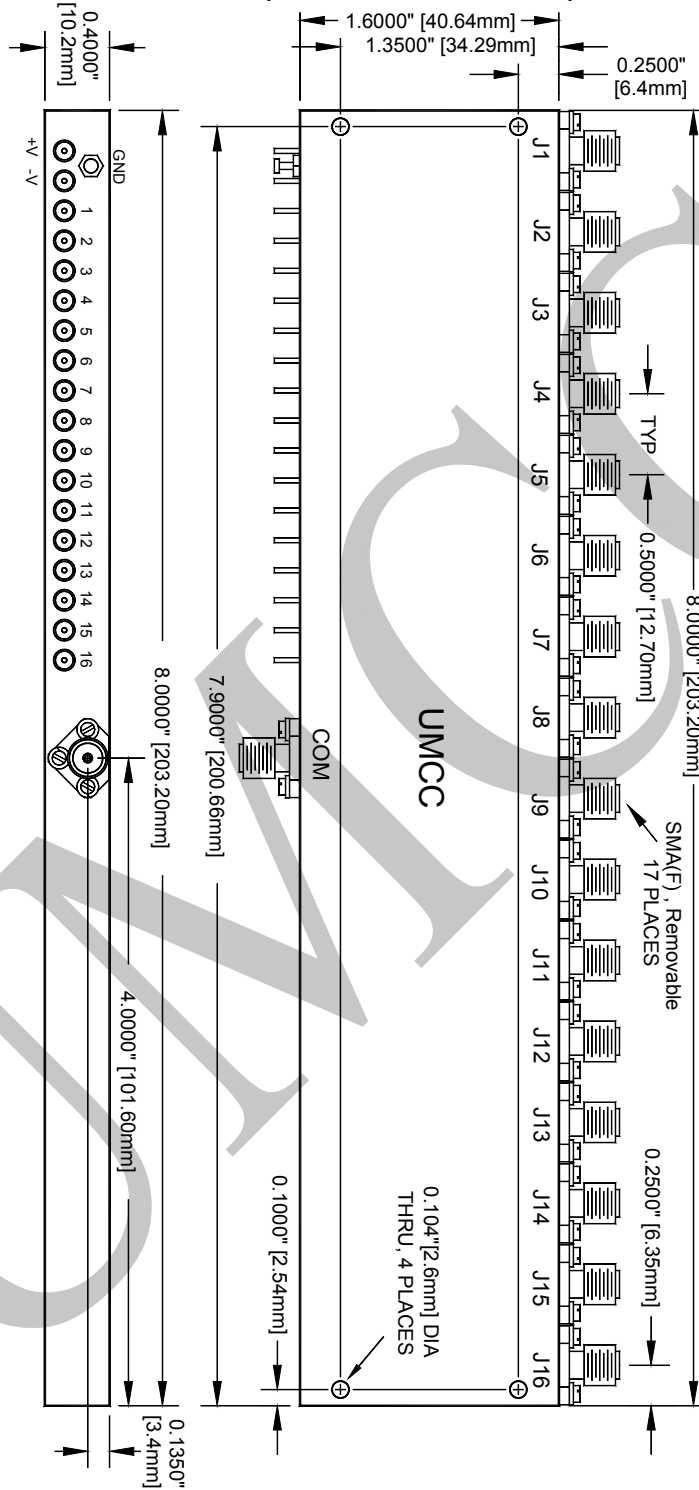


Weight	Tolerances
6.5 oz [184g]	±0.015" [±0.38mm]



Model: SR-J440-16S

**Outline (Option "F2" for 4-Bit Binary Control + Enable)**

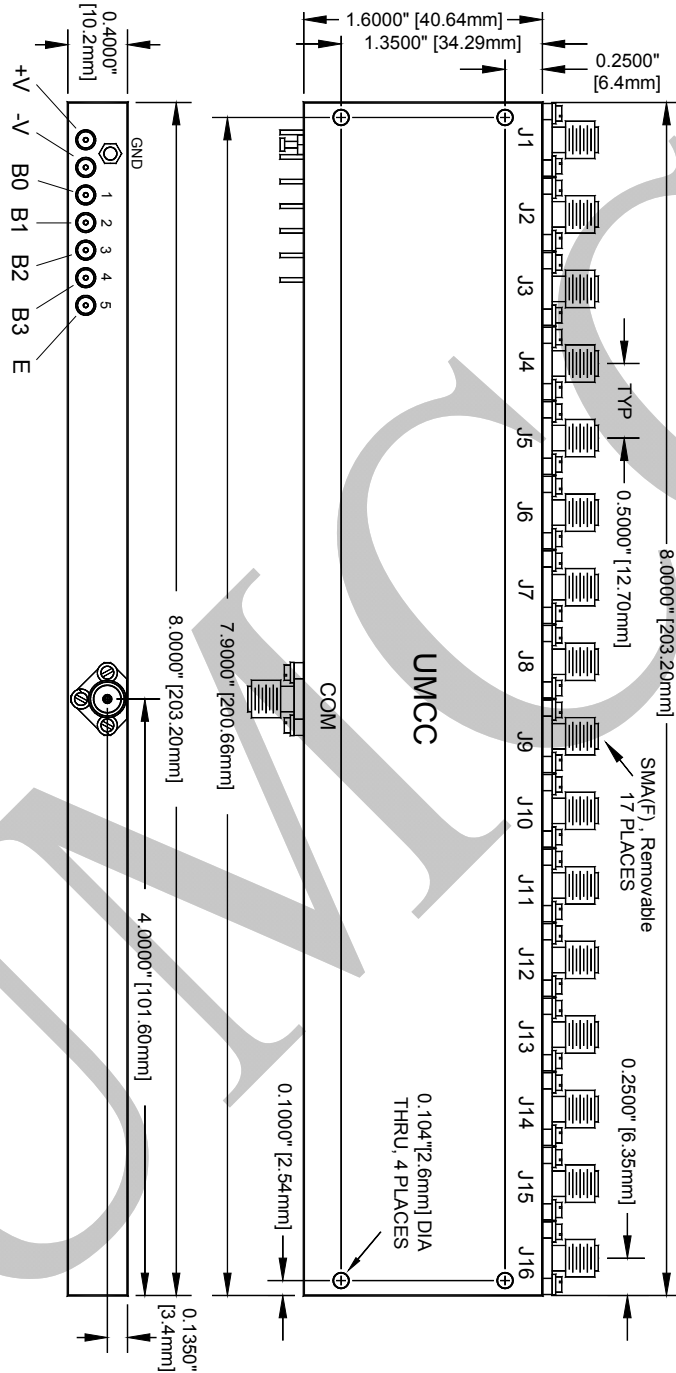

Weight	Tolerances
6.5 oz [184g]	±0.015" [±0.38mm]



**Model: SR-J440-16S**

Function Table for Option "F2" (4-Bit Binary Control + Enable)

INPUTS					RF PATH FROM "COM" PORT TO "JXX" PORT															
E	B3	B2	B1	B0	J1	J2	J3	J4	J5	J6	J7	J8	J9	J10	J11	J12	J13	J14	J15	J16
0	0	0	0	0	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
0	0	0	0	1	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
0	0	0	1	0	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
0	0	0	1	1	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
0	0	1	0	0	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
0	0	1	0	1	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
0	0	1	1	0	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
0	0	1	1	1	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
0	1	0	0	0	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF
0	1	0	0	1	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF
0	1	0	1	0	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF
0	1	0	1	1	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
0	1	1	0	0	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
0	1	1	0	1	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
0	1	1	1	0	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
0	1	1	1	1	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON
1	X	X	X	X	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF