



**Model: SW-R410-6S**

Description:	SP6T, Absorptive, PIN-Switch
Operating Frequency:	0.15 – 8 GHz
Insertion Loss:	2.8 dB Max
Isolation (Arm-to-Arm):	70 dB Max
VSWR (“ON” paths & “OFF” ports):	1.8:1 Max
Rise/Fall time (10% to 90% RF, 90% to 10% RF):	20 ns Max
On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF):	60 ns Max
Phase Balance (Deviation from Median):	±5° max
Operating Power:	CW & AVG ..... +27dBm Max *
	* ..... (+24dBm Max into “JX” Port @ Off-State)
	Peak: ..... 5W @ 1µS PW Max
Control Input Characteristics:	Std. TTL / Unit-Load / Floating-High
Control Logic:	6-Controls, Logic “0” = RF Path “ON”
Power Supplies:	+5(±0.25)V @ 200mA Max
	-12(±0.5)V @ 80mA Max
Connectors (RF):	SMA (f), Removable
Connectors (Supplies/Controls)	Solder Pins
Impedance:	50 Ω Nominal
Quality:	Best-Commercial-Grade

**Environmental Ratings:**

Temperature:	{Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity:	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock:	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration:	MIL-STD-202F, Method 204D, Cond. B (.06” double amplitude, or 15G)
Altitude:	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock:	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

**Available Options:**

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

- A1 [ +5(±0.25)V / -5(±0.25)V ] \*
- A2 [ +5(±0.25)V / -15(±0.5)V ]
- A3 [ +12(±0.5)V / -12(±0.5)V ]
- A4 [ +15(±0.5)V / -15(±0.5)V ]

■ **RF Connectors**

- B1 [ J1 – J6 Ports with SMA(M) ]
- B2 [ All SMA (M) ]
- B3 [ COM Port with SMA(M) ]

■ **Control Function**


- F1 [ Inverse Logic, (“1” = Path “ON”) ]

\* Recommended for Low Power Consumption <> Additional Switching Delay (ON/OFF time)



**Model: SW-R410-6S**

**Outline**

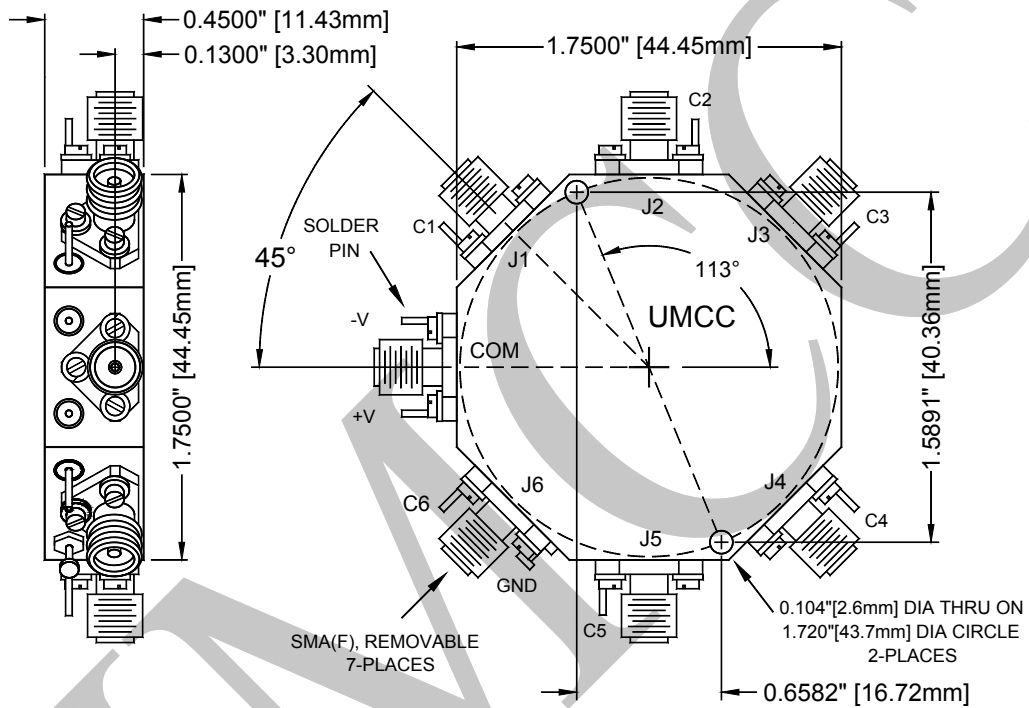

Weight	Tolerances
1.80 oz [51.0g]	±0.015" [±0.38mm]