




**Model: BC-L000-6S**

Description:	6 dB Bi-Directional Coupler
Operating Frequency:	2 - 8 GHz
Coupling (reference to input):	6 ± 0.75 dB Nominal
Coupling Flatness:	± 0.8 dB Max
Total Insertion Loss (including coupled power):	3.9 dB Max
Directivity:	15 dB Min
VSWR:	Line 1.45:1 Max
	Couple 1.35:1 Max
Power Handling:	4 W Cw/Avg Max
Connectors:	SMA (f)
Impedance:	50 Ω Nominal
Quality:	Best-Commercial-Grade

**Environmental Ratings:**

Temperature:	{Operating: -40°C to +85°C} & {Storage: -50°C to +100°C}
Humidity:	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock:	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration:	MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude:	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock:	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

**Outline**  
("A" = 4.600" [116.8mm])

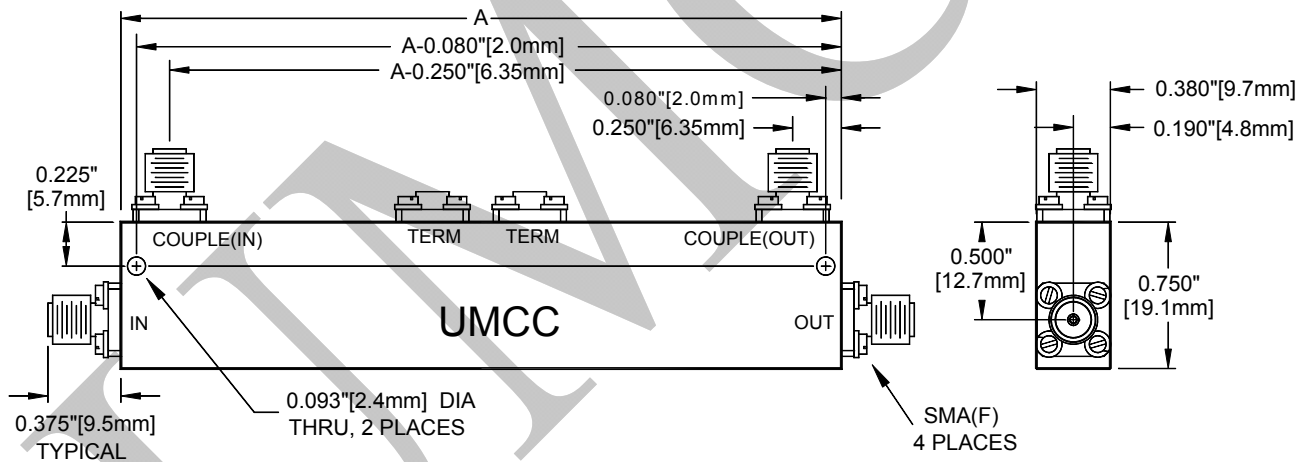

Weight
2.5 oz [70.9 g]