



Model: PD-0500-3N

Description:..... 3-Way Power Divider
 Operating Frequency:..... 1-500 MHz
 Insertion Loss / Isolation / Amplitude Balance / Phase Balance:


Frequency	Insertion Loss	Isolation	Ampl. Bal.	Phase Bal.
1-200 MHz	0.8 dB Max	20 dB Min	±0.1 dB Max	±0.5° Max
200-500 MHz	1.4 dB Max		±0.2 dB Max	±1.5° Max

VSWR:..... Σ Port..... 1.35:1 Max
 Outputs..... 1.35:1 Max
 Power Handling (@ SUM-Port):..... Load VSWR=∞..... 2W AVG/CW Max
 Load VSWR <2:1..... 8W AVG/CW Max
 Connectors:..... N (f)
 Impedance:..... 50 Ohms Nominal
 Quality:..... Best-Commercial-Grade

Environmental Ratings:

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
 Humidity:..... MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
 Shock:..... MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
 Vibration:..... MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
 Altitude:..... MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
 Temp. Shock:..... MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Outline

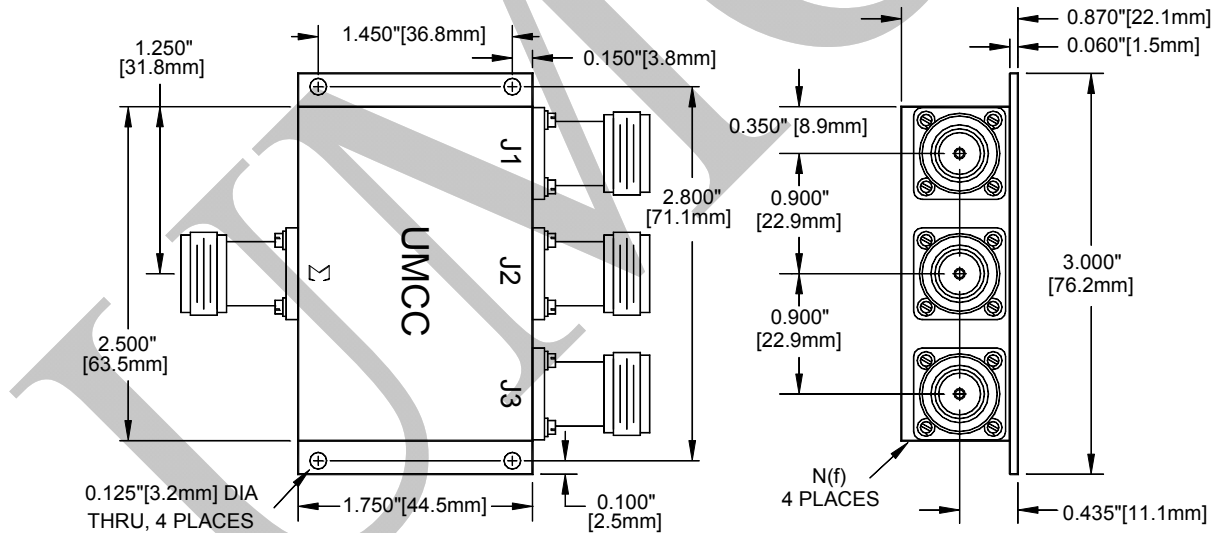

Weight	Tolerances
	± 0.015" [± 0.38 mm]