




Model: PS-D000-6S

Description:..... 6-Way Power Divider
 Operating Frequency:..... 1.9 – 4.5 GHz
 Insertion Loss: 0.7 dB Max
 Isolation: 20 dB Min
 VSWR: Σ Port..... 1.5:1 Max
 Outputs..... 1.3:1 Max
 Amplitude Balance:..... \pm 0.2 dB Max
 Phase Balance:..... \pm 4° Max
 Power Handling (@ Σ -Port): Load VSWR= ∞ 2W AVG/CW Max
 Load VSWR <2:1..... 20W AVG/CW Max
 Impedance: 50 Ohms Nominal
 Quality:..... Best-Commercial-Grade

Environmental Ratings:

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
 Humidity: MIL-STD-202F, Method 103B Cond. B (96 hours at 95% R.H.)
 Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
 Vibration: MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
 Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
 Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

**Outline
 (A = 3.500" [88.9mm])**

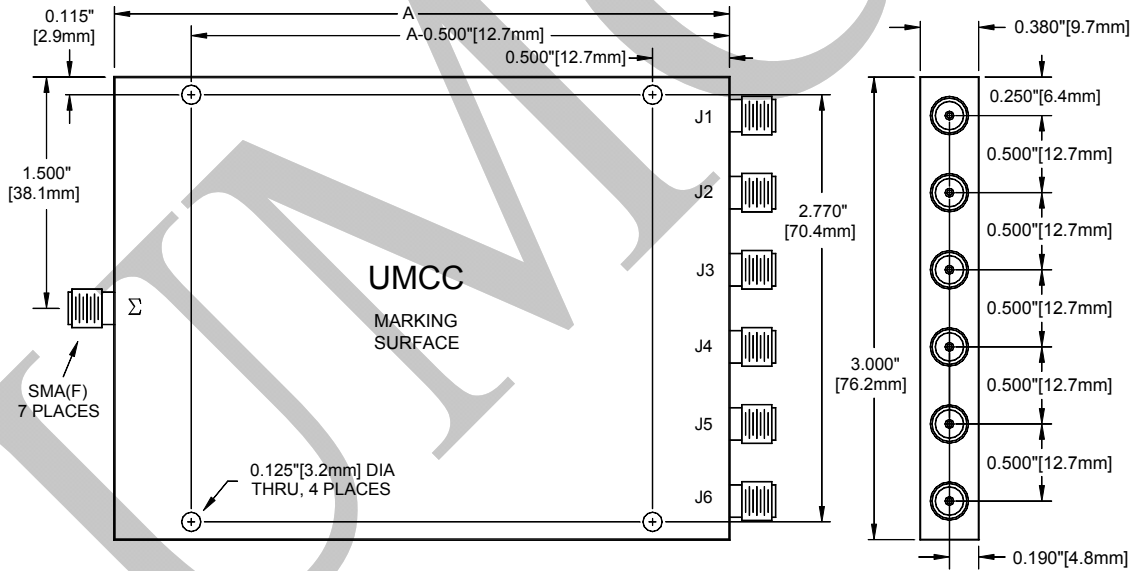

Weight	Tolerances
	\pm 0.015" [\pm 0.38mm]