



Model: SR-S000-TS

Description:	DPDT, PIN-Transfer-Switch
Operating Frequency:	2 – 18 GHz
Insertion Loss:	2.8dB Max
Isolation:	70dB Min
VSWR (“ON” paths):	1.8:1 Max
Rise/Fall time (10% to 90% RF, 90% to 10% RF):	25 ns Max
On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF):	60 ns Max
Operating Power:	CW&AVG: +30dBm Max
	Peak: 10W @ 1µS PW Max
	PRF: 1MHz Max
Control Input Characteristics:	TTL /Unit-Load, 1-Control / Floating-High
Control Logic:	Logic “0” = RF Path J1 to J2 & J3 to J4
	Logic “1” = RF Path J1 to J4 & J3 to J2
Power Supplies:	+5(±0.25)V @ 100mA Max
	-12(±0.5)V @ 100mA Max
Connectors (RF):	SMA (f), Removable
Connectors (Supplies/Controls)	Solder Pins
Impedance:	50 Ohms Nominal
Quality:	Best-Commercial-Grade

Environmental Ratings:

Temperature:	{Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity:	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock:	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration:	MIL-STD-202F, Method 204D, Cond. B (.06” double amplitude, or 15G)
Altitude:	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock:	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

- A1 [+5(±0.25)V / -5(±0.25)V]*
- A2 [+5(±0.25)V / -15(±0.5)V]
- A3 [+12(±0.5)V / -12(±0.5)V]
- A4 [+15(±0.5)V / -15(±0.5)V]

■ **Control Impedance**

- D1 [50Ω, Internally Terminated]

■ **Control Function**

- F1 [Inverse Logic, (“1” = Path “ON”)]

■ **RF Connectors**

- B1 [J1 & J3 Ports with SMA(M)]
- B2 [All SMA (M)]
- B3 [J2 & J4 Ports with SMA(M)]

■ **Video Suppression Filter**


- G1 [VF @ J1 & J3 Ports <> 0.25 dB additional Loss]
- G2 [VF @ J2 & J4 Ports <> 0.25 dB additional Loss]
- G3 [VF @ All Ports <> 0.5 dB additional Loss]

* Recommended for Low Power Consumption <> Additional Switching Delay (ON/OFF time)



Model: SR-S000-TS

Outline

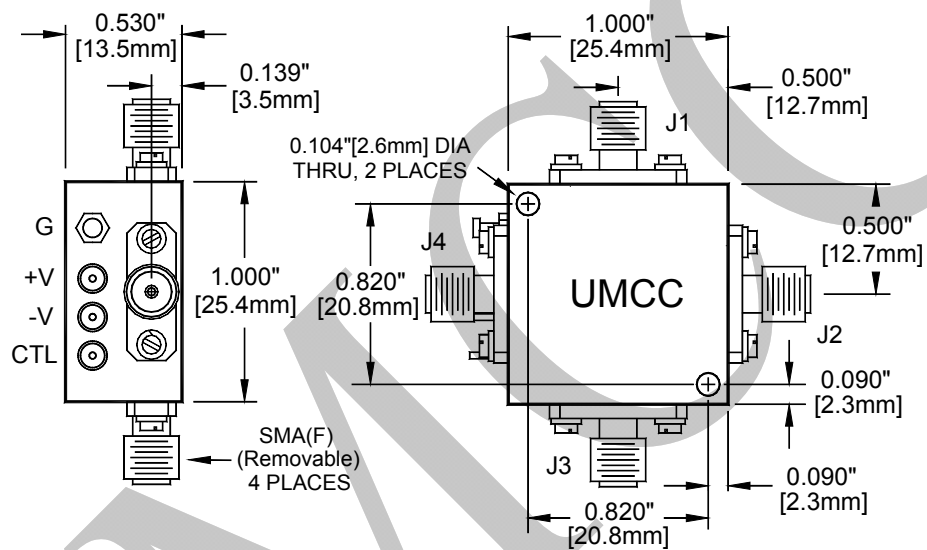

Weight	Tolerances
1.0 oz [28.4g]	±0.015" [±0.38mm]