



Model: SR-3000-1S

Description: SP1T, Reflective Pin-Switch
Operating Frequency: 10 - 3000 MHz
Insertion Loss: 2.2dB Max
Isolation:

Table with 2 columns: Frequency Range, Isolation. Values: 10 - 2000 MHz (65 dB Min), 2000 - 3000 MHz (60 dB Max)

VSWR (RF Path "ON"):

Table with 2 columns: Frequency Range, VSWR. Values: 10 - 20 MHz (1.8:1 Max), 20 - 3000 MHz (1.4:1 Max)

Rise/Fall time (10% to 90% RF, 90% to 10% RF): 100 ns Max
On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF): 250 ns Max
Operating Power: CW / AVG +27 dBm Max *
* {+23dbm Max below 100MHz}
Peak: 5W @ 1µS PW & 10% Duty-Cycle Max
Control Input Characteristics: TTL /Unit-Load, Floating-High
Control Logic: 1-Control, Logic "0" = RF Path "ON"
Power Supplies: +5(±0.25) V @ 50mA Max
-12(±0.5) V @ 60mA Max
Connectors (RF): SMA (F), Removable
Connectors (Supplies & Controls): Solder Pins
Impedance: 50 Ohms Nominal
Quality: Best-Commercial-Grade

Environmental Ratings:

Temperature: {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity: MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration: MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

Supply Voltages

- A1 [+5(±0.25)V / -5(±0.25)V]
A2 [+5(±0.25)V / -15(±0.5)V]
A3 [+12(±0.5)V / -12(±0.5)V]
A4 [+15(±0.5)V / -15(±0.5)V]

RF Connectors

- B1 [J1 SMA(M) / J2 SMA(F)]
B2 [J1 SMA(F) / J2 SMA(M)]
B3 [All SMA(M)]

Control Connectors

- C1 [SMC(Jack), 50 Ω]
C2 [SMB(Jack), 50 Ω]

Control Impedance

- D1 [50 Ω, Internally Terminated]

Control Function


- F1 [Inverse Logic, ("1" = Path "ON")]



Model: SR-3000-1S

Model: SR-3000-1S

Outline

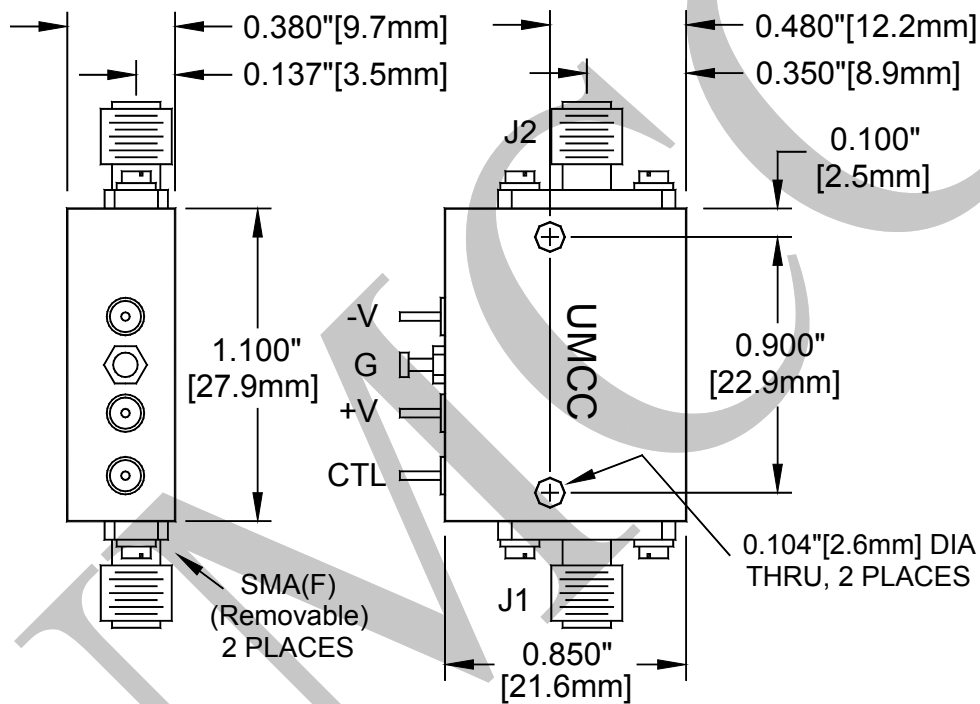

Weight	Tolerances
0.7 oz [19.8g]	±0.015" [±0.38mm]