



Model: SR-A400-1S

Description:..... SP1T, Reflective Pin-Switch

Operating Frequency:..... 40-4000 MHz

Insertion Loss:

40-2000 MHz	2-4 GHz
0.8 dB Max	1.0 dB Max

Isolation:

40-2000 MHz	2-4 GHz
40 dB Min	35 dB Min

VSWR (RF Path "ON"): 1.3:1 Max
 Rise/Fall time (10% to 90% RF, 90% to 10% RF): 3.8 μs Max
 On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF): 4.0 μs Max
 Switching Frequency: 500 KHz Max
 Operating Power:..... CW / AVG +30 dBm Max
 Peak: 10W @ 10μS PW Max
 Control Input Characteristics: TTL /Unit-Load, Floating-High
 Control Logic:..... 1-Control, Logic "0" = RF Path "ON"
 Power Supplies:..... +5(±0.25) V @ 60 mA Max
 -5 (±0.25) V @ 50 mA Max
 Connectors (RF):..... SMA (F), Removable
 Connectors (Supplies & Controls) Solder Pins
 Impedance: 50 Ohms Nominal
 Quality:..... Best-Commercial-Grade

Environmental Ratings:

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
 Humidity: MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
 Shock: MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
 Vibration: MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
 Altitude: MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
 Temp. Shock: MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

- A0 [+5(±0.25)V / -12(±0.5)V]
- A2 [+5(±0.25)V / -15(±0.5)V]
- A3 [+12(±0.5)V / -12(±0.5)V]
- A4 [+15(±0.5)V / -15(±0.5)V]

■ **RF Connectors**

- B1 [J1 SMA(M) / J2 SMA(F)]
- B2 [J1 SMA(F) / J2 SMA(M)]
- B3 [All SMA(M)]

■ **Control Connectors**

- C1 [SMC(Jack), 50 Ω]
- C2 [SMB(Jack), 50 Ω]

■ **Control Impedance**

- D1 [50 Ω, Internally Terminated]


■ **Control Function**

- F1 [Inverse Logic, ("1" = Path "ON")]



Model: SR-A400-1S

Outline

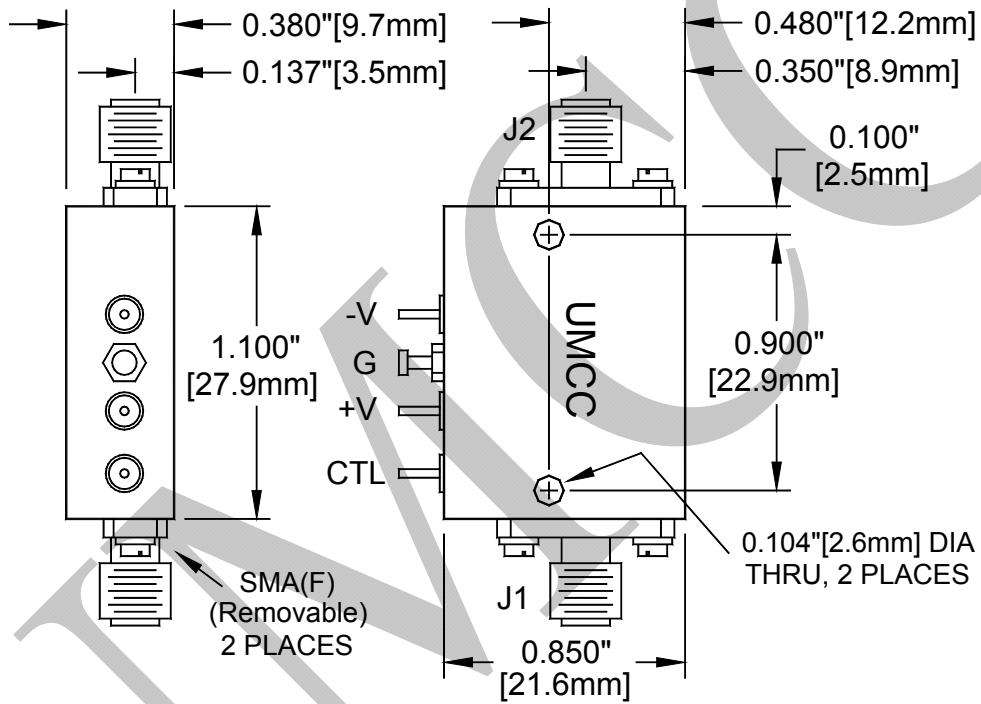

Weight	Tolerances
0.7 oz [19.8g]	±0.015" [±0.38mm]