



Model: SR-V710-1S

Description:	SP1T, Absorptive, PIN-Switch
Operating Frequency:	0.3 - 18 GHz
Insertion Loss:	3.0 dB Max
Isolation:	90 dB Min
VSWR (RF Path "ON" or "OFF"):	1.85:1 Max
Rise/Fall time (10% to 90% RF, 90% to 10% RF):	25 ns Max
On/Off time (50% TTL to 90% RF, 50%TTL to 10% RF):	100 ns Max
Operating Power:	CW/AVG +24 dBm Max
	Peak..... 5W @ 1µs-PW Max
Control Input Characteristics:	Std. TTL / Unit-Load / Floating-High
Control Logic:	1-Control, Logic "0" = RF Path "ON"
Power Supplies:	+5(±0.25)V @ 70mA Max
	-12(±0.5)V @ 50mA Max
Connectors (RF):	SMA (f), Removable
Connectors (Supplies/Controls)	Solder Pins
Impedance:	50 Ω Nominal
Quality:	Best-Commercial-Grade

Environmental Ratings:

Temperature:	{Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
Humidity:	MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)
Shock:	MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
Vibration:	MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
Altitude:	MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
Temp. Shock:	MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

- A1 [+5(±0.25)V / -5(±0.25)V] *
- A2 [+5(±0.25)V / -15(±0.5)V]
- A3 [+12(±0.5)V / -12(±0.5)V]
- A4 [+15(±0.5)V / -15(±0.5)V]

■ **Control Impedance**

- D1 [50 Ω, Internally Terminated]

■ **Control Function**

- F1 [Inverse Logic, ("1" = Path "ON")]

■ **RF Connectors**

- B1 [J1 SMA(M) / J2 SMA(F)]
- B2 [J1 SMA(F) / J2 SMA(M)]
- B3 [All SMA(M)]

■ **Video Suppression Filter**

- G1 [VF @ J2 Port <> 0.25 dB additional Loss]
- G2 [VF @ J1 & J2 Ports <> 0.5 dB additional Loss]

■ **Control Connectors**


- C1 [SMC(Jack), 50 Ω]
- C2 [SMB(Jack), 50 Ω]

* Additional 50ns Switching Delay (the On/Off Time)



Model: SR-V710-1S

Outline

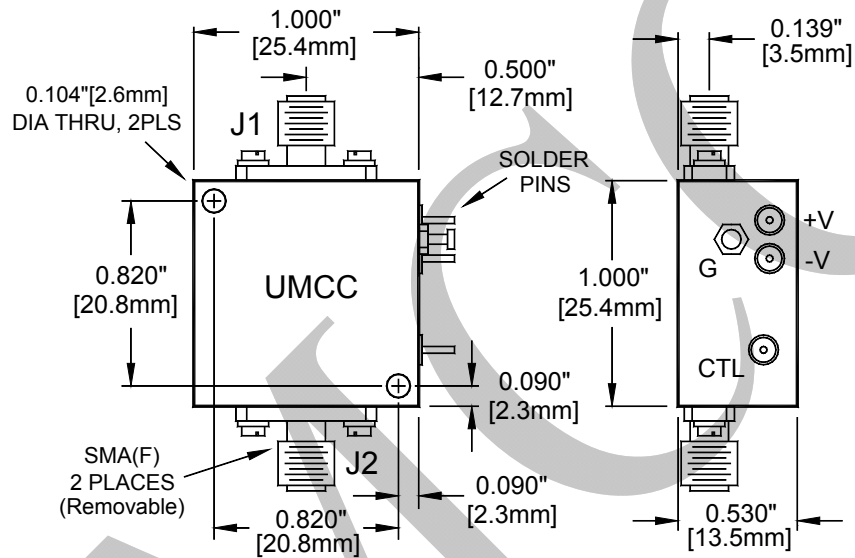

Weight	Tolerances
0.8 oz [22.7g]	±0.015" [±0.38mm]